



JUHONG

PRODUCT CATALOG

产品目录

联系方式

邮箱: sales@jhstrapping.com

手机: +86 17826135709

官网: www.jhstrapping.com

地址: 江苏省常州市钟楼区邹区镇卜弋友谊北路 32 号

CONTACT

Email: sales@jhstrapping.com

Phone: +86 17826135709

Website: www.jsjhpackaging.com

Address: No.32 North Youyi Road, Zouqu, Zhonglou, Changzhou, Jiangsu, China

目录 CONTENTS

公司历史

COMPANY HISTORY

3

钢带

STEEL STRAPPING

5

PET 打包带

PET STRAPPING

15

打包扣

STEEL SEAL

25

缠绕膜

STRETCH FILM

29

证书

CERTIFICATION

33

客户

CUSTOMERS

34





公司历史 COMPANY HISTORY

1997

- 成立常州市武进卜弋通达冲件厂（巨弘包装前身）
Established Changzhou Wujin Buyi Tongda Stamping Plant(the predecessor of Juhong Packing Materials)

1999

- 成功研发自动排扣
Successfully developed magazine strapping seal.

2005

- 获得“江苏质量信得过产品”荣誉证书
Awarded the honorary certificate of “Jiangsu Quality Trustworthy Product.”

2009

- 获得“常州市民营科技企业”认定证书，“江苏省民营科技企业”认定证书
Obtained the recognition certificates of “Private Science and Technology Enterprise of Changzhou City” and “Private Science and Technology Enterprise of Jiangsu Province.”

2010

- 江苏巨弘捆带制造有限公司成立
Jiangsu Juhong Strapping Manufacturing Co., Ltd. established

2011

- PET 打包带投产，钢带投产
Started production of PET strapping and steel strapping

2014

- 专利证书注册完成
Patent registered
- 一种去除冷轧钢带切边毛刺装置
Device for Removing Burrs from Steel Strap Edges
- 一种自动排扣
Automatic Magazine strapping seal
- 荣获江苏省科学技术厅颁发的“国家高新技术企业证书”
Awarded the “National High-tech Enterprise Certificate issued by the Jiangsu Provincial Department of Science and Technology.

2015

- “巨弘”商标注册成功
The trademark “Juhong” successfully registered
- 成立常州市高强度合金捆带工程技术研究中心
Established the Changzhou High-strength steel Strapping Engineering Technology Research Center.
- 新增钢带产线，月产能由 1000 吨增至 5000 吨。
New steel strapping line added, boosting monthly capacity from 1,000 to 5,000 tons.

2017

- PET 产线扩至 4 条，月产能由 150 吨增至 600 吨。
Expanded PET lines to four, boosting capacity from 150 to 600 tons/month.

2018

- 厂区面积由 6,000 m²扩至 20,000 m²。
Plant area enlarged from 6,000 m² to 20,000 m².

2021

- PE 缠绕膜投产
Started production of PE Stretch film

2022

- 通过美国铁路协会 (AAR) 认证
Obtained Association of American Railroads (AAR) certification

2025

- 公司名由“江苏巨弘捆带制造有限公司”升级为“巨弘包装材料（江苏）有限公司”。
Upgraded name from Jiangsu Juhong Strapping Manufacturing Co.,Ltd. to Juhong Packing Materials Jiangsu Co., Ltd.
- 第 3 条钢带生产线、第 4 条缠绕膜生产线、第 5 条 PET 生产线正在调试中，预计年底正式投产
3rd steel strapping, 4th stretch film, and 5th PET strapping lines are under commissioning and scheduled to start production by year-end 2025.

钢带
STEEL STRAPPING

钢带规格表 STEEL STRAP SPECIFICATION

巨弘包装材料				Terra 砥石系列			Ridge 擎岭系列			Pivot 星枢系列			Duro 峰极系列			Nexa 穹界系列			JUHONG PACKING MATERIALS		
宽度 Width		厚度 Thickness		拉力 Strength			拉力 Strength			拉力 Strength			拉力 Strength			拉力 Strength			长度 / 单位重量 Length/Weight		卷型 Coil Winding
英寸 in	毫米 mm	英寸 in	毫米 mm	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	英尺 / 磅 ft/lb	米 /kg m/kg	
1/2	12.7	0.015	0.38	706	3137	650	/	/	/	/	/	/	/	/	/	/	/	/	39.2	26.5	M/R
1/2	12.7	0.020	0.51	947	4210	650	1093	4858	750	1209	5376	830	1355	6024	930	1428	6347	980	29.4	19.8	M/R/O/J
1/2	12.7	0.023	0.58	1077	4788	650	1243	5525	750	1375	6114	830	1541	6850	930	1624	7219	980	25.6	17.2	M/R/O/J
5/8	16	0.015	0.38	889	3952	650	/	/	/	/	/	/	/	/	/	/	/	/	29.6	20.0	M/R
5/8	16	0.020	0.51	1193	5304	650	1377	6120	750	1524	6773	830	1707	7589	930	1799	7997	980	23.6	15.9	M/R/O/J
5/8	16	0.023	0.58	1357	6032	650	1566	6960	750	1733	7702	830	1941	8630	930	2046	9094	980	20.5	13.8	M/R/O/J
3/4	19	0.020	0.51	1417	6299	650	1635	7268	750	1809	8043	830	2027	9012	930	2136	9496	980	19.6	13.2	M/R/O/J
3/4	19	0.023	0.58	1611	7163	650	1859	8265	750	2058	9147	830	2306	10249	930	2429	10800	980	17.1	11.5	M/R/O/J
3/4	19	0.028	0.71	1973	8769	650	2276	10118	750	2519	11197	830	2822	12546	930	2974	13220	980	14.2	9.6	M/R/O/J
3/4	19	0.031	0.79	2195	9757	650	2532	11258	750	2803	12458	830	3140	13959	930	3309	14710	980	12.5	8.4	M/R/O/J
3/4	19	0.035	0.89	2473	10992	650	2853	12683	750	3157	14035	830	3538	15726	930	3728	16572	980	11.1	7.5	M/R/O/J
1	25	0.031	0.79	2888	12838	650	3332	14813	750	3688	16393	830	4132	18368	930	4354	19355	980	9.5	6.4	M/R/J
1	25	0.035	0.89	3253	14463	650	3754	16688	750	4154	18468	830	4655	20693	930	4905	21805	980	8.5	5.7	M/R/J
1 1/4	31.75 (32)	0.028	0.71	3296	14653	650	3803	16907	750	4209	18710	830	4716	20965	930	4970	22092	980	8.5	5.7	M/R/J
1 1/4	31.75 (32)	0.031	0.79	3668	16304	650	4232	18812	750	4683	20818	830	5248	23327	930	5530	24581	980	7.4	5.0	M/R/J
1 1/4	31.75 (32)	0.035	0.89	4132	18367	650	4768	21193	750	5276	23454	830	5912	26279	930	6230	27692	980	6.7	4.5	M/R/J
1 1/4	31.75 (32)	0.040	1.00	/	/	/	5357	23813	750	5928	26353	830	6642	29528	930	7000	31115	980	5.9	4.0	R/J
1 1/4	31.75 (32)	0.044	1.10	/	/	/	5893	26194	750	6521	28988	830	7307	32480	930	7700	34227	980	5.3	3.6	R/J
2	50	0.047	1.20	/	/	/	/	/	/	/	/	/	/	/	/	8400	37338	980	3.1	2.1	R/J

UltiMax 极元系列 HT												
宽度 Width		厚度 Thickness		拉力 Strength			延伸率 Elongation		长度 / 单位重量 Length/Weight		卷型 Coil Winding	标准 STANDARD
英寸 in	毫米 mm	英寸 in	毫米 mm	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	%	英尺 / 磅 ft/lb	米 /kg m/kg			
3/4	19	0.031	0.79	3377	15010	1000	≥ 10%	12.5	8.4	R/O/J	美标 & 欧标 ASTM & EN	
1 1/4	31.75	0.031	0.79	5643	25083	1000	≥ 10%	7.4	5	R/O/J		
3/4	19	0.031	0.79	3039	13509	900	6.5-12 % min	12.5	8.4	R/O/J		
1 1/4	31.75	0.031	0.79	5078	22574	900	6.5-12 % min	7.4	5	R/O/J		
M= 迷你卷; R= 单卷; O= 复卷; J= 大复卷 M=Mini wound, R=Ribbon wound, O=Oscillated wound, J=Jumbo wound												



表面处理 FINISH



- 光亮带
Bright
- 发蓝 & 涂蜡
Blue tempered & waxed
- 涂漆 & 涂蜡
Painted and waxed
- 镀锌
Galvanized

缠绕方式 WOUND WAY



迷你卷 Mini coil	< 25kgs (55lbs)
单卷 Ribbon coil	25-50kgs (55-110 lbs)
复卷 Oscillated coil	40-50kgs (88-110 lbs)
大复卷 / 超大复卷 Jumbo/Super Jumbo coil	180-600kgs (396-1322 lbs)

卷尺寸 COIL SIZE

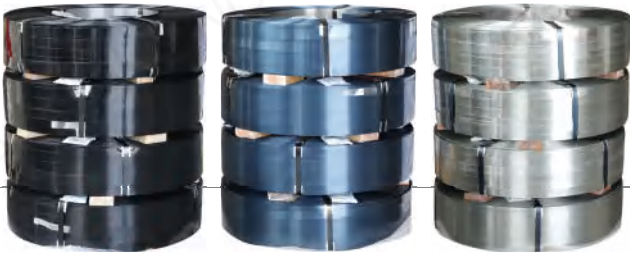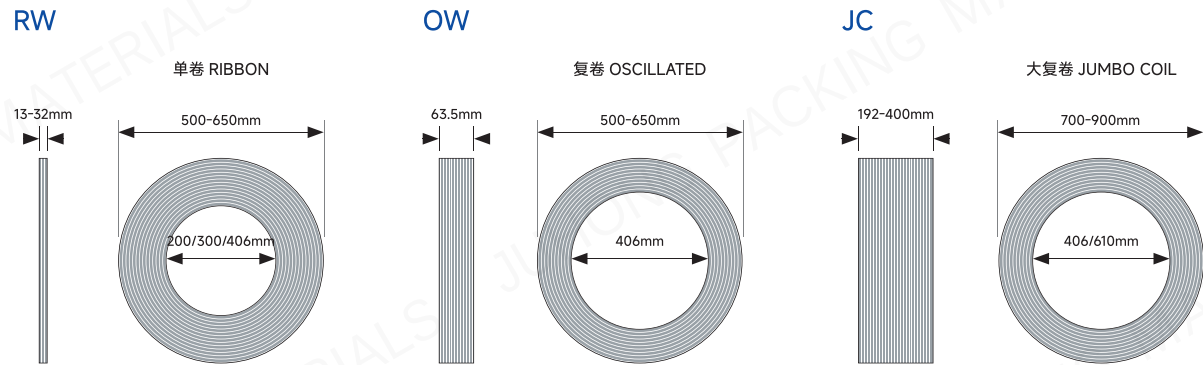

JUHONG 钢带
——可靠、安全、国际认证

JUHONG STEEL STRAPPING
- RELIABLE, SAFE & INTERNATIONALLY CERTIFIED



- 全面强度选择
Strength Options
涵盖常规至超高抗拉强度，满足各类工业包装需求。
From regular to ultra-high tensile, meeting diverse industrial needs.



- 符合全球标准
Global Standards
符合国标、欧标、美标、日标标准。
Compliant with GB, EN, ASTM, and JIS standard .



- 边缘顺滑
Smooth Edges
精确去毛刺，防止手部伤害，确保操作安全。
Precisely de-burred to prevent hand injuries and ensure safe handling.



- 认证表面涂层
Certified Coating
涂层均匀，防锈性能优异，第三方认证。
Even coating with excellent anti-rust performance, verified by third-party certification.



- 多样缠绕方式
Wound Types
迷你、单卷、复卷、大复卷、超大复卷，满足各类包装需求。
Mini, Ribbon, Oscillated, Jumbo, and Super Jumbo to suit diverse packaging needs.



FITS DIVERSE STRAPPING MACHINE



泰坦
Titan



钢坂
Kohan Kogyo



捷锐
Generica



信诺
Signode



派克威
Packway



泰尔
Taier



西马克
SMS

适配各种打包机 FITS DIVERSE STRAPPING MACHINE

钢带打包带，兼容手动、气动及全自动设备，实现快速、牢固、可靠的打包效果。
Strapping bands that work with hand, pneumatic, or fully-auto machines—delivering fast, strong, and reliable performance.

服务多元化行业 SERVING DIVERSE INDUSTRIES

并深受信赖，涉及多个领域
TRUSTED AND APPLIED ACROSS
NUMEROUS SECTORS

- 钢卷 Steel coil
- 线材 Steel Wire
- 有色金属 Non-Ferrous Metal
- 玻璃 Glass
- 木材 Lumber
- 建材 Construction Materials
- 物流 Logistics



玻璃
Glass



电解铜
Electrolytic Copper



钢卷
Steel Coil



木框架
Wooden Frame



线缆
Steel Wire



钢管
Steel Tube




有色金属锭
Non Ferrous Ingot

搭接方式 JOINT METHOD

通用性强，可靠适配多种连接方式与打包机，保障高效稳定。
Universal and reliable—compatible with multiple joint types and strapping machines for efficient, stable performance.



打包扣连接
Seal joint

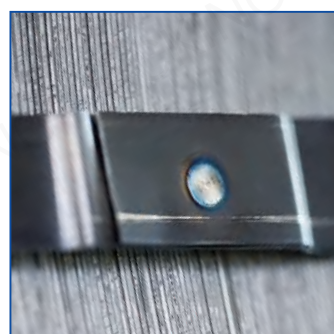



点焊免扣连接
Spot-weld sealless joints



模切免扣连接
Die-cut sealless joints

包装 PACKAGING

- 可选单片包装或常规包装
- 单独包装卷采用 VCI 防锈纸缠绕
- 固定于出口木托盘或铁托盘上
- 托盘外覆 VCI 防锈膜，内置干燥剂
- 最外层可选棕色 / 白色 VCI 防锈纸或瓦楞护套
- Individual or non-individual packing
- Individual pack wrapped in VCI anti-rust paper
- Coils secured on wooden or iron pallet
- Covered with VCI film, with desiccants inside
- Outer layer: brown/white VCI paper or corrugated sleeve



PET 打包带
PET STRAPPING


PET 规格表 PET SPECIFICATION

宽度 Width		厚度范围 Thickness Range		拉力范围 Break Range		常用规格
英寸 in	毫米 mm	英寸 in	毫米 mm	千克 kg	牛 N	Best Selling Dimensions
		最小 - 最大 min - max	最小 - 最大 min - max	最小 - 最大 min - max	最小 - 最大 min - max	mm
3/8	9	0.021-0.024	0.5 - 0.8	157- 360	1540 - 3550	9*0.6
	10	0.021-0.024	0.5 - 0.8	175 - 400	1715 - 3920	10*0.5
1/2	11	0.021-0.040	0.5 - 0.8	192 - 440	1880 - 4300	11*0.6
	12	0.021-0.040	0.5 - 1.0	210 - 600	2050 - 5880	12*0.6/0.7
	13	0.021-0.040	0.5 - 1.0	227 - 650	2230 - 6370	13*0.6
5/8	15	0.021-0.040	0.5 - 1.0	210 - 750	2000 - 7350	15*0.8
	16	0.021-0.050	0.5 - 1.2	225 - 960	2200 - 9400	16*0.8/0.9/1.0
3/4	19	0.031-0.055	0.8 - 1.4	420 - 1330	4170 -13030	19*0.8/1.0/1.2
1	25	0.031-0.055	0.8 - 1.4	700 - 1750	6860 -17150	25*1.0/1.2
1 1/4	32/31.75	0.031-0.055	0.8 - 1.4	880 - 2240	8710 - 21950	32*1.0/1.2






表面 SURFACE



压纹
Embossed



光面
Smooth



- 轻便灵活，操作简单方便。
Lightweight and flexible, easy and convenient to handle.



- 不生锈，不会对产品造成损伤。
Rust-free and non-damaging to packaged products.



- 可配合全自动打包机、电动打包机、气动打包机及打包扣使用。
Compatible with fully auto/battery-powered/pneumatic machines, and seals.



- 可根据客户需求生产不同规格和长度。
Available in various dimensions and lengths tailored to customer requirements.



- 100% 可回收再利用，绿色环保。
100% recyclable and environmentally friendly.

颜色 COLOR

- 绿色
Green
- 黑色
Black
- 白色
White
- 定制颜色
Customized color



搭接方式 JOINT METHOD



打包扣
Seal



摩擦热熔
Friction-welded



热刀热熔
heat-sealed(hot knife)

适配所有打包机

COMPATIBLE WITH DIVERSE STRAPPING PACKING SYSTEM

全面适配各类打包机，从手动、电动、气动到全自动，始终保持高效与可靠，助力畅快打包。
Seamlessly compatible with diverse strapping machine—from manual, battery powered, pneumatic to fully automatic—ensuring fast, reliable performance for effortless packaging.



意达拓思
ITATOOLS



欧嘉派克
ORGAPACK




气动打包机
PNEUMATIC TOOL




弗洛姆
FROMM



意帝派克
ITIPACK




信诺
SIGNODE



赛克
CYKLOP



捷锐
GENERICA

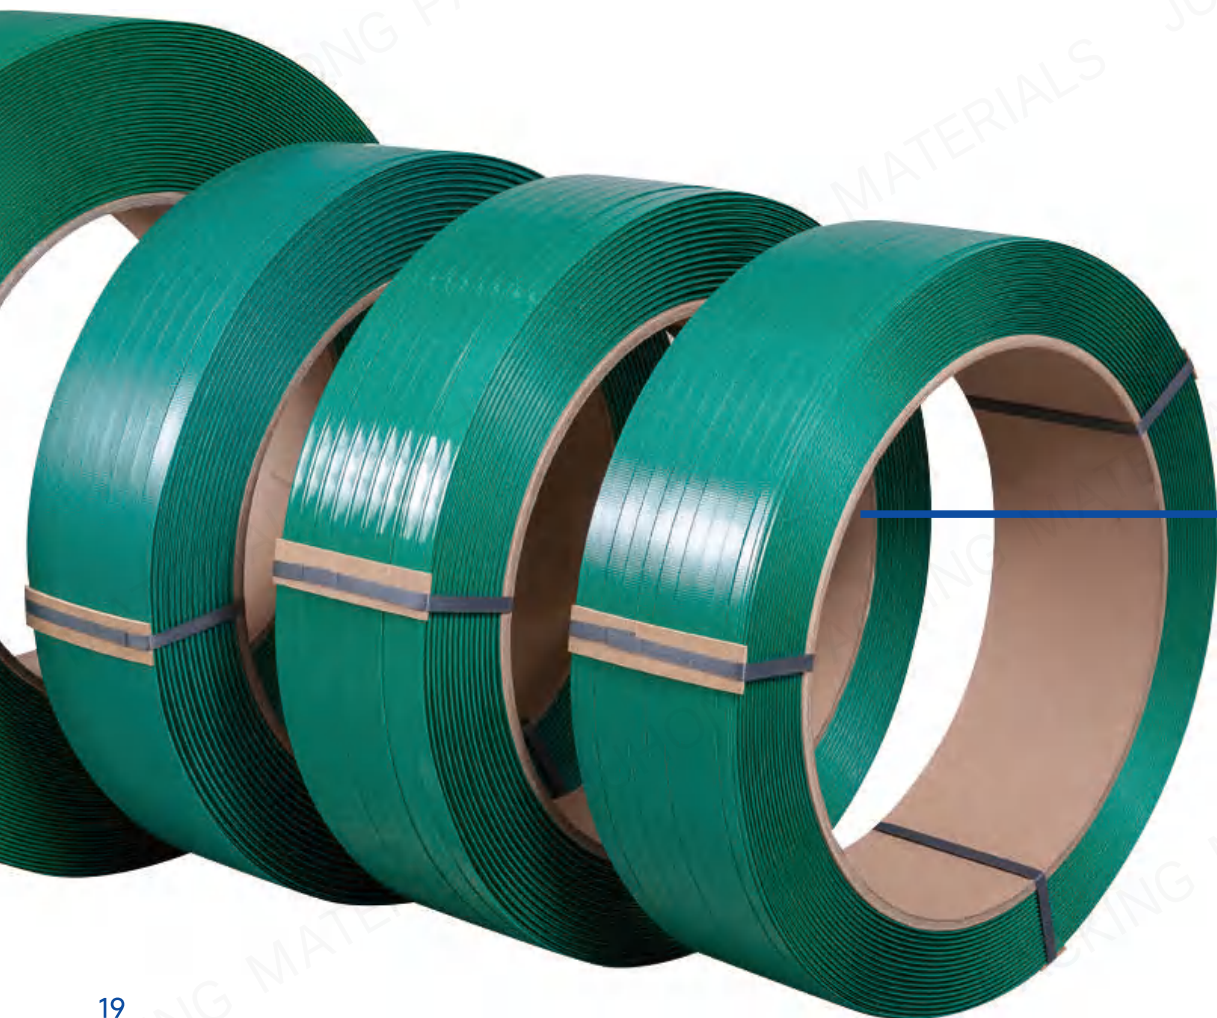


应用行业 APPLICATION INDUSTRY

各行业信赖
Trusted Across Industries

巨弘 PET 打包带以稳定可靠的性能，广泛应用于棉花包、砖石、有色金属锭、瓶罐、纸类、金属卷、木材、管材及玻璃制品包装，长期赢得客户信赖与合作。
Juhong PET strapping, known for its reliable performance, is trusted in packaging cotton bale, bricks, non-ferrous ingots, bottles, paper, metal coils, lumber, pipes, and glass products, securing lasting customer partnerships.



棉花
Cotton Bale



砖石
Brick




有色金属锭
Non Ferrous Ingot



瓶罐
Bottle



纸卷
Paper Roll



金属卷
Steel Coil



木材
Timber




管材类
Pipe



玻璃
Glass

PET 打包带循环流程 PET STRAPPING CIRCULAR PROCESS

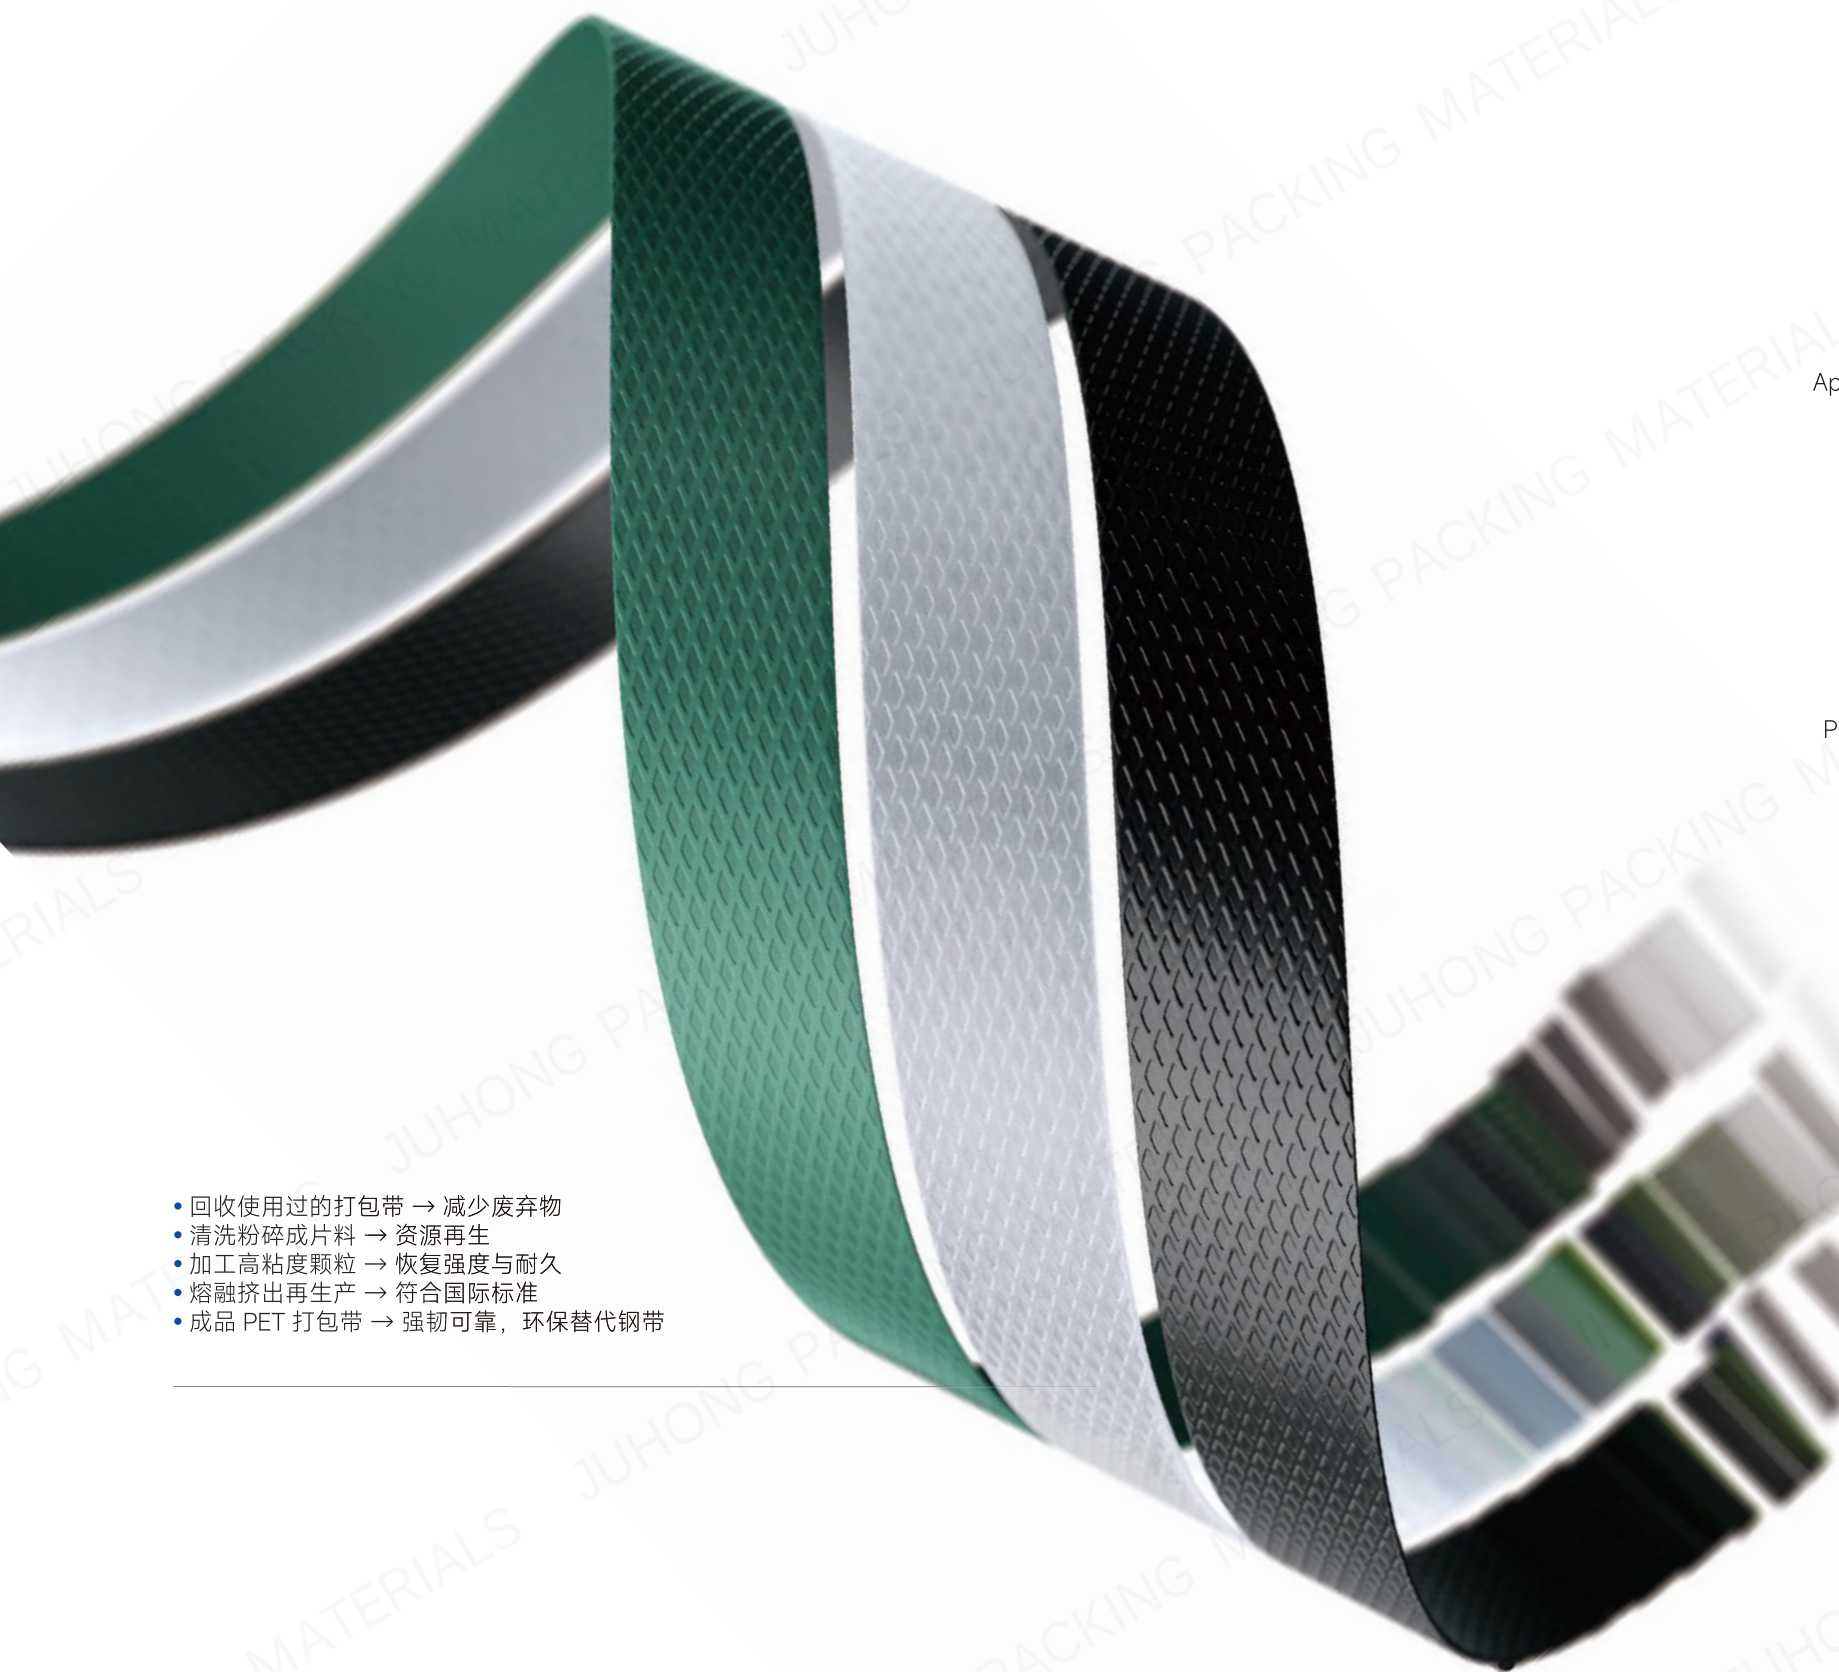


- 回收使用过的打包带 → 减少废弃物
- 清洗粉碎成片料 → 资源再生
- 加工高粘度颗粒 → 恢复强度与耐久
- 熔融挤出再生产 → 符合国际标准
- 成品 PET 打包带 → 强韧可靠，环保替代钢带




- Collection → Used straps recovered, waste reduced
- Flakes → Cleaned & shredded for reuse
- High IV Granules → Strength & durability restored
- Extrusion → Manufactured to global standards
- Finished Strap → Tough, reliable & eco-friendly steel alternative

包装方式 PACKAGING

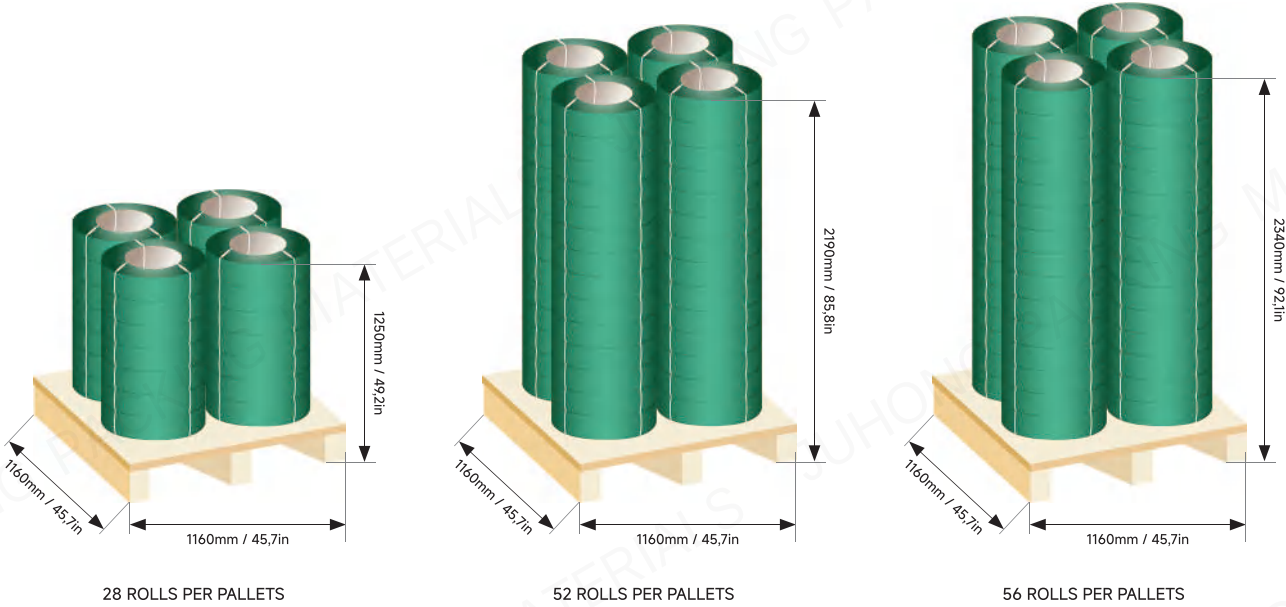

我们的 PET 打包带通常为每托 28 卷、52 卷或 56 卷包装，方便运输与储存。同时，我们可以根据客户的仓储条件以及品牌宣传需求，提供灵活的定制包装方案，既实用又能提升品牌形象。

Our PET strapping is typically packed in 28, 52, or 56 rolls per pallet for convenient storage and transport. We also provide flexible customized packaging solutions tailored to customers' storage conditions and branding needs, combining practicality with enhanced brand presentation.

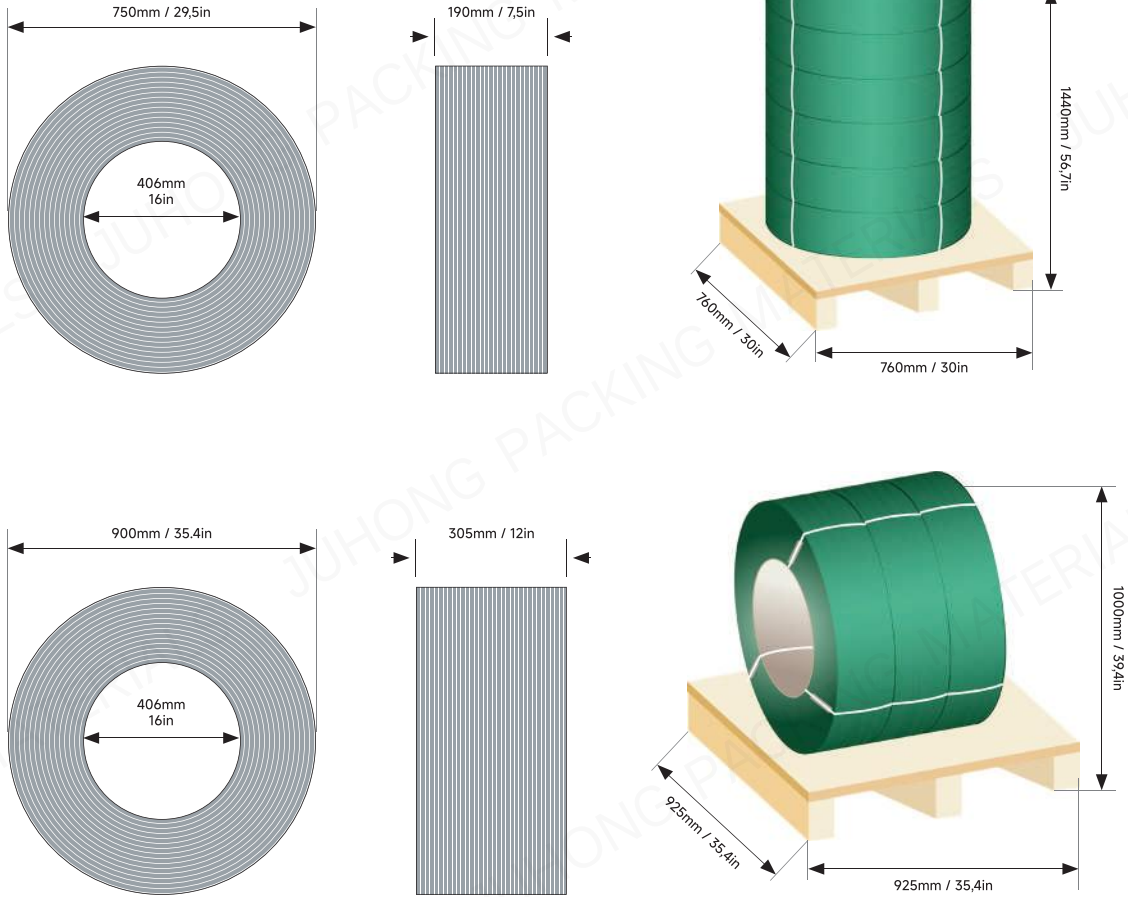

重量 / 卷 Weight /Rolls	10 kgs	20 kgs	70 kgs	330 kgs	切带棉花带 Cut Cotton Strap
纸芯规格 Core Dimensions	406x76 mm (16x3)	406x150 mm (16x6)	406x190 mm (16x7.5)	406x305mm (16x12)	/
卷 / 托盘 Rolls/Pallet	48/52 卷	28/32/52/56/60 卷	6 卷	3 卷	定制
	48/52 rolls	28/32/52/56/60 rolls	6 rolls	3 rolls	Customized

打包扣
STEEL SEAL



打包扣 STEEL SEAL

锁扣类型 Seal Type	带宽 Strap Width	锁扣长 * 厚 Seal L * T	带宽 Strap Width	锁扣长 * 厚 Seal L * T
	英寸 in	英寸 in	毫米 mm	毫米 mm
闭式扣 Push Type	1/2	0.86*.023	12.7	22*0.6
	5/8	0.86*.023	16	22*0.6
		0.98*.023		25*0.6
	3/4	0.86*.023	19	22*0.6
		0.98*.023		25*0.6
		1.26*.023		32*0.6
		1.57*.023		40*0.6
		1.57*.028		40*0.7
		1.77*.028		45*0.7
		1.77*.031		45*0.8
		1.77*.035		45*0.9
		1.89*.031		48*0.8
		1.89*.035		48*0.9
		2*.035		50*0.9
		2.16*.035		55*0.9
		2.24*.035		57*0.9
	1	1.89*.031	25	48*0.8
		1.89*.035		48*0.9
		2*.035		50*0.9
	1 1/4	1.5*.035	32/31.75	38*0.9
		1.57*.028		40*0.7
		1.77*.028		45*0.7
		1.77*.031		45*0.8
		1.77*.035		45*0.9
		1.89*.028		48*0.7
		1.89*.031		48*0.8
		1.89*.035		48*0.9
		2*.035		50*0.9
		2.16*.028		55*0.7
		2.08*.035		53*0.9
		2.16*.035		55*0.9
		2.24*.035		57*0.9
		2.95*.035		75*0.9

锁扣类型 Seal Type	带宽 Strap Width	锁扣长 * 厚 Seal L * T	带宽 Strap Width	锁扣长 * 厚 Seal L * T
	英寸 in	英寸 in	毫米 mm	毫米 mm
防滑扣 Serrated	3/4	1.02*.028	19	26*0.7
		1.10*.023		28*0.6
	5/8	1.02*.028	16	26*0.7
		1.10*.023		28*0.6
	1/2	1.02*.028	12.7	26*0.7
		1.10*.023		28*0.6
半闭式 Open-flange	1	2.16*.035	25	55*0.9
	1 1/4	2.16*.035	32/31.75	55*0.9
半开式 Thread-on	3/4	2.16*.035	19	55*0.9
	1 1/4	1.57*.028	32/31.75	40*0.7
		1.77*.031		45*0.8
		1.77*.028		45*0.7
		1.89*.035		48*0.9
		2*.035		50*0.9
开式 Snap-on	1/2	1.26*.023	12.7	32*0.6
	5/8	1.26*.023	16	32*0.6
	3/4	1.26*.023	19	32*0.6
自动排扣 Magazine	3/4	1.10*.023	19	28*0.6
	1 1/4	1.5*.031	32/31.75	38*0.8
		1.5*.040		38*1.0
		1.57*.040		40*1.0
		2*.040		50*1.0
	2	2*.043	50	51*1.1
		2.95*.040		75*1.0
十字扣 Cross-shaped	1 1/4	2.95*.05		75*1.2
十字扣 Cross-shaped	1 1/4	5.8*.035	32/31.75	148*0.9
直角扣 Right-angle	1 1/4	0.035	32/31.75	0.7

品类齐全 COMPLETE RANGE

钢带、塑料带专用打包扣一应俱全，涵盖闭式、开式、半开式、半闭式、自动排扣、防滑扣等多种类型，满足各类打包需求。
Comprehensive seals for both steel and plastic strapping, including Push, Snap-on, Thread-on, Open-flange, Magazine, and Serrated types—covering varied packaging need.

个性定制 CUSTOM BRANDING


支持冲压 LOGO 与外包装定制，提升品牌形象，打造更专业的包装方案。
Logo stamping and packaging customization available to elevate brand identity and deliver a more professional packaging solution.




开式扣
Snap on Seal




闭式扣
Push Seal

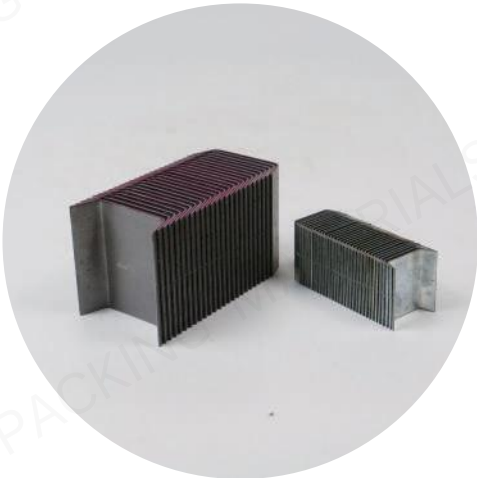


机用锁扣（自动扣）
Magazine Seal

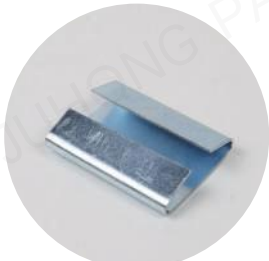


半开式
Thread-on Seal



半闭式
Open-flange Seal



防滑扣 Serrated Seal
(点状 Dotted)



防滑扣
Serrated Seal

缠绕膜
STRETCH FILM

系列 Series	膜层数 Film Layer	特征 Characteristics	颜色 Colour
极科 11 Xtr11	11 层 11-layer	出色的防穿刺和抗撕裂性能 Outstanding durability against punctures and tears 11 层不同材质交叉形成多层加固结构 Robust, Multi-layer cross-reinforced structure 运输过程中更佳的载荷稳定性 Improved load stability during transport 高性价比的产品表现 Cost-efficient performance 首选 Top choice	透明 Transparent
优智 7 Optima 7	7 层 7-layer	可靠的防穿刺和抗撕裂性能 Reliable puncture and tear resistance 多层交叉加固结构 Layered cross-reinforced structure 更佳的载荷稳定性 Enhanced load stability 性价比高且实用 Cost-efficient and practical	透明, 黑色, 白色, 定制颜色 Transparent, black, white, customized colour
基础 5 Base 5	5 层 5-layer	良好的防穿刺和抗撕裂性能 Strong puncture and tear resistance 良好的伸展性 Good stretchability 性价比产品 Cost-effective solution 环保设计 Eco-friendly design 热销款 Popular Choice	透明, 黑色, 白色, 定制颜色 Transparent, black, white, customized colour

应用场景
APPLICATION SCENARIOS




玻璃瓶
Bottle



仓储物流
Warehouse & Logistic



罐头
Can



石膏板
Gypsum board



纸卷
Paper



玻璃
Glass



轮毂
Wheel Hub

手用膜 HAND FILM

手用拉伸膜用于人工包装，厚度 8-35 微米，宽度 250、400、450、500 毫米，可满足不同需求。
Hand stretch film for manual wrapping, available in 8-35 μm thickness and widths of 250, 400, 450, and 500 mm to suit various needs.



厚度 Thickness	8-11 μm	12 μm	15-35 μm
宽度 Width	250,400,450,500 mm	250,400,450,500 mm	250,400,450,500 mm
净重 Net weight	0.7-4kgs	0.7-4kgs	0.7-8kg
延伸性 Stretchability	120-200%	150%-250%	150%-500%
颜色 Colour	Transparent	Transparent	Transparent, black, white, blue and customized color

迷你膜 MINI WRAP

迷你膜是手用拉伸膜中最小规格，也称迷你卷。适用于不同尺寸货物的缠绕与捆绑。可选通用型或左右手专用型，特点是小巧便捷、操作简单。
Mini wrap is the smallest type of hand stretch film, also known as mini roll. It is ideal for wrapping and bundling loads of different sizes. Offered in universal and left/right-handed versions, it is compact and easy to use.



厚度 Thickness	8-35 μm
宽度 Width	100,125mm
延伸性 Elongation	120-250%
颜色 Colour	透明，黑色，白色，蓝色和其他定制颜色 Transparent, black, white, blue and customized color

机用缠绕膜 MACHINE STRETCH FLIM

机用拉伸膜适用于各类缠绕机，实现快速全自动包装，广泛应用于制造和物流。
Machine stretch film fits diverse wrapping machines, enabling fast auto wrapping and widely used in manufacturing and logistics.



厚度 Thickness	8-9 μm	10-11 μm	12 μm
宽度 Width	250-2000 m	250-2000 m	250-2000 m
净重 Net weight	5-25 kg	5-25 kg	5-25 kg
延伸性 Elongation	120-180 %	120-200 %	120-250 %

厚度 Thickness	15-16 μm	17-23 μm	30-35 μm	40-50 μm
宽度 Width	250-2000 m	250-2000 m	250-2000 m	250-2000m
净重 Net weight	5-25 kg	5-25 kg	5-25 kg	5-25kgs
延伸性 Elongation	150-300 %	150-350 %	150%-370%	150-500%

母卷缠绕膜 JUMBO STRETCH FLIM

母卷拉伸膜主要供分切商使用，再分卷成适用于手用和机用的小卷。
Jumbo stretch film is mainly supplied to converters, who rewind it into smaller rolls for manual and machine use.



厚度 Thickness	8-9 μm	10-11 μm	12 μm
宽度 Width	250,400,450,500 mm	250,400,450,500 mm	250,400,450,500 mm
净重 Net weight	25-58kgs	25-58kgs	25-58kgs
延伸性 Elongation	120-200%	150%-250%	150%-250%
颜色 Colour	透明 Transparent	透明 Transparent	透明 Transparent

厚度 Thickness	15-16 μm	17-23 μm	30-35 μm
宽度 Width	250,400,450,500 mm	250,400,450,500 mm	250,400,450,500 mm
净重 Net weight	25-58kgs	25-58kgs	25-58kgs
延伸性 El	120-300%	150%-350%	150%-500%
颜色 Colour	透明 Transparent	透明，黑色，白色，蓝色和定制颜色 Transparent, black, white, blue and customized color	

客户 CUSTOMERS



宝武集团
BAOWU



浦项
POSCO



安赛乐米塔尔
ARCELOMITTAL



永青
ETERNAL TSINGSHAN



信义玻璃
XINYI GLASS



金光纸业
APP



圣戈班
SAINT-GOBAIN



北新建材
CNBM



福耀玻璃
FUYAO GLASS



天合光能
TRINA SOLAR




紫金矿业
ZIJIN MINING



江西铜业
JIANGXI COPPER



雪花啤酒
SNOW



中国铝业
CHALCO



REACH
ROHS
MSDS



ISO9001
ISO14001
ISO45001



AAR

证书 CERTIFICATION