



# JUHONG

## PRODUCT CATALOG

## 产品目录

### 联系方式

邮箱: [sales@jhstrapping.com](mailto:sales@jhstrapping.com)

手机: +86 17826135709

官网: [www.jhstrapping.com](http://www.jhstrapping.com)

地址: 江苏省常州市钟楼区邹区镇卜弋友谊北路 32 号

### CONTACT

Email: [sales@jhstrapping.com](mailto:sales@jhstrapping.com)

Phone: +86 17826135709

Website: [www.jsjhpackaging.com](http://www.jsjhpackaging.com)

Address: No.32 North Youyi Road, Zouqu, Zhonglou, Changzhou, Jiangsu, China

# 目录 CONTENTS

|      |   |
|------|---|
| 公司历史 | 3 |
|------|---|

COMPANY HISTORY

|    |   |
|----|---|
| 钢带 | 5 |
|----|---|

STEEL STRAPPING

|         |    |
|---------|----|
| PET 打包带 | 15 |
|---------|----|

PET STRAPPING

|     |    |
|-----|----|
| 打包扣 | 25 |
|-----|----|

STEEL SEAL

|     |    |
|-----|----|
| 缠绕膜 | 29 |
|-----|----|

STRETCH FILM

|    |    |
|----|----|
| 证书 | 35 |
|----|----|

CERTIFICATION

|    |    |
|----|----|
| 客户 | 36 |
|----|----|

CUSTOMERS



## 公司历史

## COMPANY HISTORY



### 1997

- 成立常州市武进卜弋通达冲件厂（巨弘包装前身）  
Established Changzhou Wujin Buyi Tongda Stamping Plant( the predecessor of Juhong Packing Materials)

### 1999

- 成功研发自动排扣  
Successfully developed magazine strapping seal.

### 2005

- 获得“江苏质量信得过产品”荣誉证书  
Awarded the honorary certificate of “Jiangsu Quality Trustworthy Product.”

### 2009

- 获得“常州市民营科技企业”认定证书，“江苏省民营科技企业”认定证书  
Obtained the recognition certificates of “Private Science and Technology Enterprise of Changzhou City” and “Private Science and Technology Enterprise of Jiangsu Province.”

### 2010

- 江苏巨弘捆带制造有限公司成立  
Jiangsu Juhong Strapping Manufacturing Co., Ltd. established

### 2011

- PET 打包带投产，钢带投产  
Started production of PET strapping and steel strapping

### 2014

- 专利证书注册完成  
Patent registered
- 一种去除冷轧钢带切边毛刺装置  
Device for Removing Burrs from Steel Strap Edges
- 一种自动排扣  
Automatic Magazine strapping seal
- 荣获江苏省科学技术厅颁发的“国家高新技术企业证书”  
Awarded the “National High-tech Enterprise Certificate issued by the Jiangsu Provincial Department of Science and Technology.

### 2015

- “巨弘”商标注册成功  
The trademark “Juhong” successfully registered
- 成立常州市高强度合金捆带工程技术研究中心  
Established the Changzhou High-strength steel Strapping Engineering Technology Research Center.
- 新增钢带产线，月产能由 1000 吨增至 5000 吨。  
New steel strapping line added, boosting monthly capacity from 1,000 to 5,000 tons.

### 2017

- PET 产线扩至 3 条，月产能由 150 吨增至 600 吨。  
Expanded PET lines to three, boosting capacity from 150 to 600 tons/month.

### 2018

- 厂区面积由 6,000 m<sup>2</sup>扩至 20,000 m<sup>2</sup>。  
Plant area enlarged from 6,000 m<sup>2</sup> to 20,000 m<sup>2</sup>.

### 2021

- PE 缠绕膜投产  
Started production of PE Stretch film

### 2022

- PET 打包带通过美国铁路协会 (AAR) 认证  
PET strapping obtained AAR certification

### 2025

- 公司名由“江苏巨弘捆带制造有限公司”升级为“巨弘包装材料(江苏)有限公司”。  
Upgraded name from Jiangsu Juhong Strapping Manufacturing Co.,Ltd. To Juhong Packing Materials Jiangsu Co., Ltd.
- 高强度钢带通过美国铁路协会 (AAR) 认证  
High tensile steel strapping obtained AAR certification
- 获评国家级专精特新“小巨人”企业  
Recognized as a National Specialized and Innovative “Little Giant” Enterprise
- 第4条缠绕膜生产线正式投产  
The 4th stretch film production line was officially put into operation
- 第4条PET打包带生产线正式投产  
The 4th PET strapping production line was officially put into operation

### 2026

- 第3条钢带生产线正式投产  
The 3rd steel strapping production line was officially put into operation

钢带  
STEEL STRAPPING

钢带规格表 STEEL STRAP SPECIFICATION


| 巨弘包装材料      |            |                 |          | Terra 砥石系列     |        |                               | Ridge 掌岭系列     |        |                               | Pivot 星枢系列     |        |                               | Duro 峰极系列      |        |                               | Nexa 穹界系列      |        |                               | JUHONG<br>PACKING MATERIALS |               |                    |
|-------------|------------|-----------------|----------|----------------|--------|-------------------------------|----------------|--------|-------------------------------|----------------|--------|-------------------------------|----------------|--------|-------------------------------|----------------|--------|-------------------------------|-----------------------------|---------------|--------------------|
| 宽度<br>Width |            | 厚度<br>Thickness |          | 拉力<br>Strength |        |                               | 拉力<br>Strength |        |                               | 拉力<br>Strength |        |                               | 拉力<br>Strength |        |                               | 拉力<br>Strength |        |                               | 长度 / 单位重量<br>Length/Weight  |               | 卷型<br>Coil Winding |
| 英寸<br>in    | 毫米<br>mm   | 英寸<br>in        | 毫米<br>mm | 磅<br>lbs       | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | 磅<br>lbs       | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | 磅<br>lbs       | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | 磅<br>lbs       | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | 磅<br>lbs       | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | 英尺 / 磅<br>ft/lb             | 米 /kg<br>m/kg |                    |
| 1/2         | 12.7       | 0.015           | 0.38     | 706            | 3137   | 650                           | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | 39.2                        | 26.5          | M/R                |
| 1/2         | 12.7       | 0.020           | 0.51     | 947            | 4210   | 650                           | 1093           | 4858   | 750                           | 1209           | 5376   | 830                           | 1355           | 6024   | 930                           | 1428           | 6347   | 980                           | 29.4                        | 19.8          | M/R/O/J            |
| 1/2         | 12.7       | 0.023           | 0.58     | 1077           | 4788   | 650                           | 1243           | 5525   | 750                           | 1375           | 6114   | 830                           | 1541           | 6850   | 930                           | 1624           | 7219   | 980                           | 25.6                        | 17.2          | M/R/O/J            |
| 5/8         | 16         | 0.015           | 0.38     | 889            | 3952   | 650                           | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | 29.6                        | 20.0          | M/R                |
| 5/8         | 16         | 0.020           | 0.51     | 1193           | 5304   | 650                           | 1377           | 6120   | 750                           | 1524           | 6773   | 830                           | 1707           | 7589   | 930                           | 1799           | 7997   | 980                           | 23.6                        | 15.9          | M/R/O/J            |
| 5/8         | 16         | 0.023           | 0.58     | 1357           | 6032   | 650                           | 1566           | 6960   | 750                           | 1733           | 7702   | 830                           | 1941           | 8630   | 930                           | 2046           | 9094   | 980                           | 20.5                        | 13.8          | M/R/O/J            |
| 3/4         | 19         | 0.020           | 0.51     | 1417           | 6299   | 650                           | 1635           | 7268   | 750                           | 1809           | 8043   | 830                           | 2027           | 9012   | 930                           | 2136           | 9496   | 980                           | 19.6                        | 13.2          | M/R/O/J            |
| 3/4         | 19         | 0.023           | 0.58     | 1611           | 7163   | 650                           | 1859           | 8265   | 750                           | 2058           | 9147   | 830                           | 2306           | 10249  | 930                           | 2429           | 10800  | 980                           | 17.1                        | 11.5          | M/R/O/J            |
| 3/4         | 19         | 0.028           | 0.71     | 1973           | 8769   | 650                           | 2276           | 10118  | 750                           | 2519           | 11197  | 830                           | 2822           | 12546  | 930                           | 2974           | 13220  | 980                           | 14.2                        | 9.6           | M/R/O/J            |
| 3/4         | 19         | 0.031           | 0.79     | 2195           | 9757   | 650                           | 2532           | 11258  | 750                           | 2803           | 12458  | 830                           | 3140           | 13959  | 930                           | 3309           | 14710  | 980                           | 12.5                        | 8.4           | M/R/O/J            |
| 3/4         | 19         | 0.035           | 0.89     | 2473           | 10992  | 650                           | 2853           | 12683  | 750                           | 3157           | 14035  | 830                           | 3538           | 15726  | 930                           | 3728           | 16572  | 980                           | 11.1                        | 7.5           | M/R/O/J            |
| 1           | 25         | 0.031           | 0.79     | 2888           | 12838  | 650                           | 3332           | 14813  | 750                           | 3688           | 16393  | 830                           | 4132           | 18368  | 930                           | 4354           | 19355  | 980                           | 9.5                         | 6.4           | M/R/J              |
| 1           | 25         | 0.035           | 0.89     | 3253           | 14463  | 650                           | 3754           | 16688  | 750                           | 4154           | 18468  | 830                           | 4655           | 20693  | 930                           | 4905           | 21805  | 980                           | 8.5                         | 5.7           | M/R/J              |
| 1 1/4       | 31.75 (32) | 0.028           | 0.71     | 3296           | 14653  | 650                           | 3803           | 16907  | 750                           | 4209           | 18710  | 830                           | 4716           | 20965  | 930                           | 4970           | 22092  | 980                           | 8.5                         | 5.7           | M/R/J              |
| 1 1/4       | 31.75 (32) | 0.031           | 0.79     | 3668           | 16304  | 650                           | 4232           | 18812  | 750                           | 4683           | 20818  | 830                           | 5248           | 23327  | 930                           | 5530           | 24581  | 980                           | 7.4                         | 5.0           | M/R/J              |
| 1 1/4       | 31.75 (32) | 0.035           | 0.89     | 4132           | 18367  | 650                           | 4768           | 21193  | 750                           | 5276           | 23454  | 830                           | 5912           | 26279  | 930                           | 6230           | 27692  | 980                           | 6.7                         | 4.5           | M/R/J              |
| 1 1/4       | 31.75 (32) | 0.040           | 1.00     | /              | /      | /                             | 5357           | 23813  | 750                           | 5928           | 26353  | 830                           | 6642           | 29528  | 930                           | 7000           | 31115  | 980                           | 5.9                         | 4.0           | R/J                |
| 1 1/4       | 31.75 (32) | 0.044           | 1.10     | /              | /      | /                             | 5893           | 26194  | 750                           | 6521           | 28988  | 830                           | 7307           | 32480  | 930                           | 7700           | 34227  | 980                           | 5.3                         | 3.6           | R/J                |
| 2           | 50         | 0.047           | 1.20     | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | /              | /      | /                             | 8400           | 37338  | 980                           | 3.1                         | 2.1           | R/J                |

| UltiMax 极元系列 HT                                                                                 |          |              |          |             |        |                               |                |                         |               |                    |                      |
|-------------------------------------------------------------------------------------------------|----------|--------------|----------|-------------|--------|-------------------------------|----------------|-------------------------|---------------|--------------------|----------------------|
| 宽度 Width                                                                                        |          | 厚度 Thickness |          | 拉力 Strength |        |                               | 延伸率 Elongation | 长度 / 单位重量 Length/Weight |               | 卷型<br>Coil Winding | 标准<br>STANDARD       |
| 英寸<br>in                                                                                        | 毫米<br>mm | 英寸<br>in     | 毫米<br>mm | 磅<br>lbs    | 牛<br>N | 牛 / 平方毫米<br>N/mm <sup>2</sup> | %              | 英尺 / 磅<br>ft/lb         | 米 /kg<br>m/kg |                    |                      |
| 3/4                                                                                             | 19       | 0.031        | 0.79     | 3377        | 15010  | 1000                          | ≥ 10%          | 12.5                    | 8.4           | R/O/J              | 美标 & 欧标<br>ASTM & EN |
| 1 1/4                                                                                           | 31.75    | 0.031        | 0.79     | 5643        | 25083  | 1000                          | ≥ 10%          | 7.4                     | 5             | R/O/J              |                      |
| 3/4                                                                                             | 19       | 0.031        | 0.79     | 3039        | 13509  | 900                           | 6.5-12 % min   | 12.5                    | 8.4           | R/O/J              |                      |
| 1 1/4                                                                                           | 31.75    | 0.031        | 0.79     | 5078        | 22574  | 900                           | 6.5-12 % min   | 7.4                     | 5             | R/O/J              |                      |
| M= 迷你卷; R= 单卷; O= 复卷; J= 大复卷<br>M=Mini wound, R=Ribbon wound, O=Oscillated wound, J=Jumbo wound |          |              |          |             |        |                               |                |                         |               |                    |                      |

表面处理 FINISH



- 光亮带  
Bright
- 发蓝 & 涂蜡  
Blue tempered & waxed
- 涂漆 & 涂蜡  
Painted and waxed
- 镀锌  
Galvanized

缠绕方式 WOUND WAY

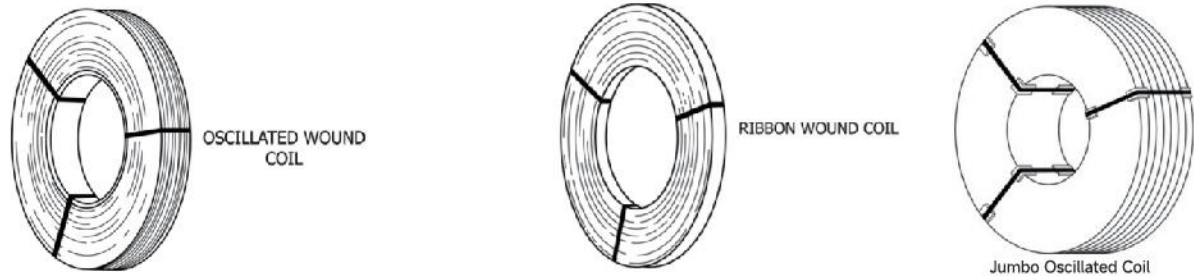

|                                   |                           |
|-----------------------------------|---------------------------|
| 迷你卷 Mini coil                     | < 25kgs (55lbs)           |
| 单卷 Ribbon coil                    | 25-50kgs (55-110 lbs)     |
| 复卷 Oscillated coil                | 40-50kgs (88-110 lbs)     |
| 大复卷 / 超大复卷 Jumbo/Super Jumbo coil | 180-600kgs (396-1322 lbs) |

卷尺寸 COIL SIZE

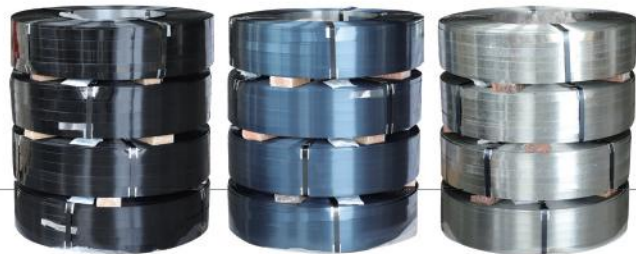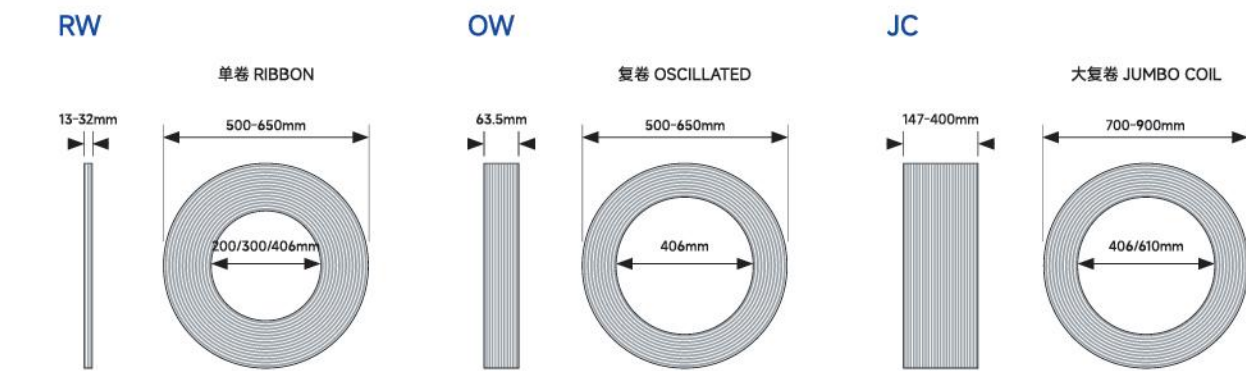

JUHONG 钢带  
——可靠、安全、国际认证

JUHONG STEEL STRAPPING  
- RELIABLE, SAFE & INTERNATIONALLY CERTIFIED



- 全面强度选择  
**Strength Options**  
涵盖常规至超高抗拉强度，满足各类工业包装需求。  
From regular to ultra-high tensile, meeting diverse industrial needs.



- 符合全球标准  
**Global Standards**  
符合国标、欧标、美标、日标标准。  
Compliant with GB, EN, ASTM, and JIS standard.



- 边缘顺滑  
**Smooth Edges**  
精确去毛刺，防止手部伤害，确保操作安全。  
Precisely de-burred to prevent hand injuries and ensure safe handling.




- 认证表面涂层  
**Certified Coating**  
涂层均匀，防锈性能优异，第三方认证。  
Even coating with excellent anti-rust performance, verified by third-party certification.



- 多样缠绕方式  
**Wound Types**  
迷你、单卷、复卷、大复卷、超大复卷，满足各类包装需求。  
Mini, Ribbon, Oscillated, Jumbo, and Super Jumbo to suit diverse packaging needs.

# FITS DIVERSE STRAPPING MACHINE

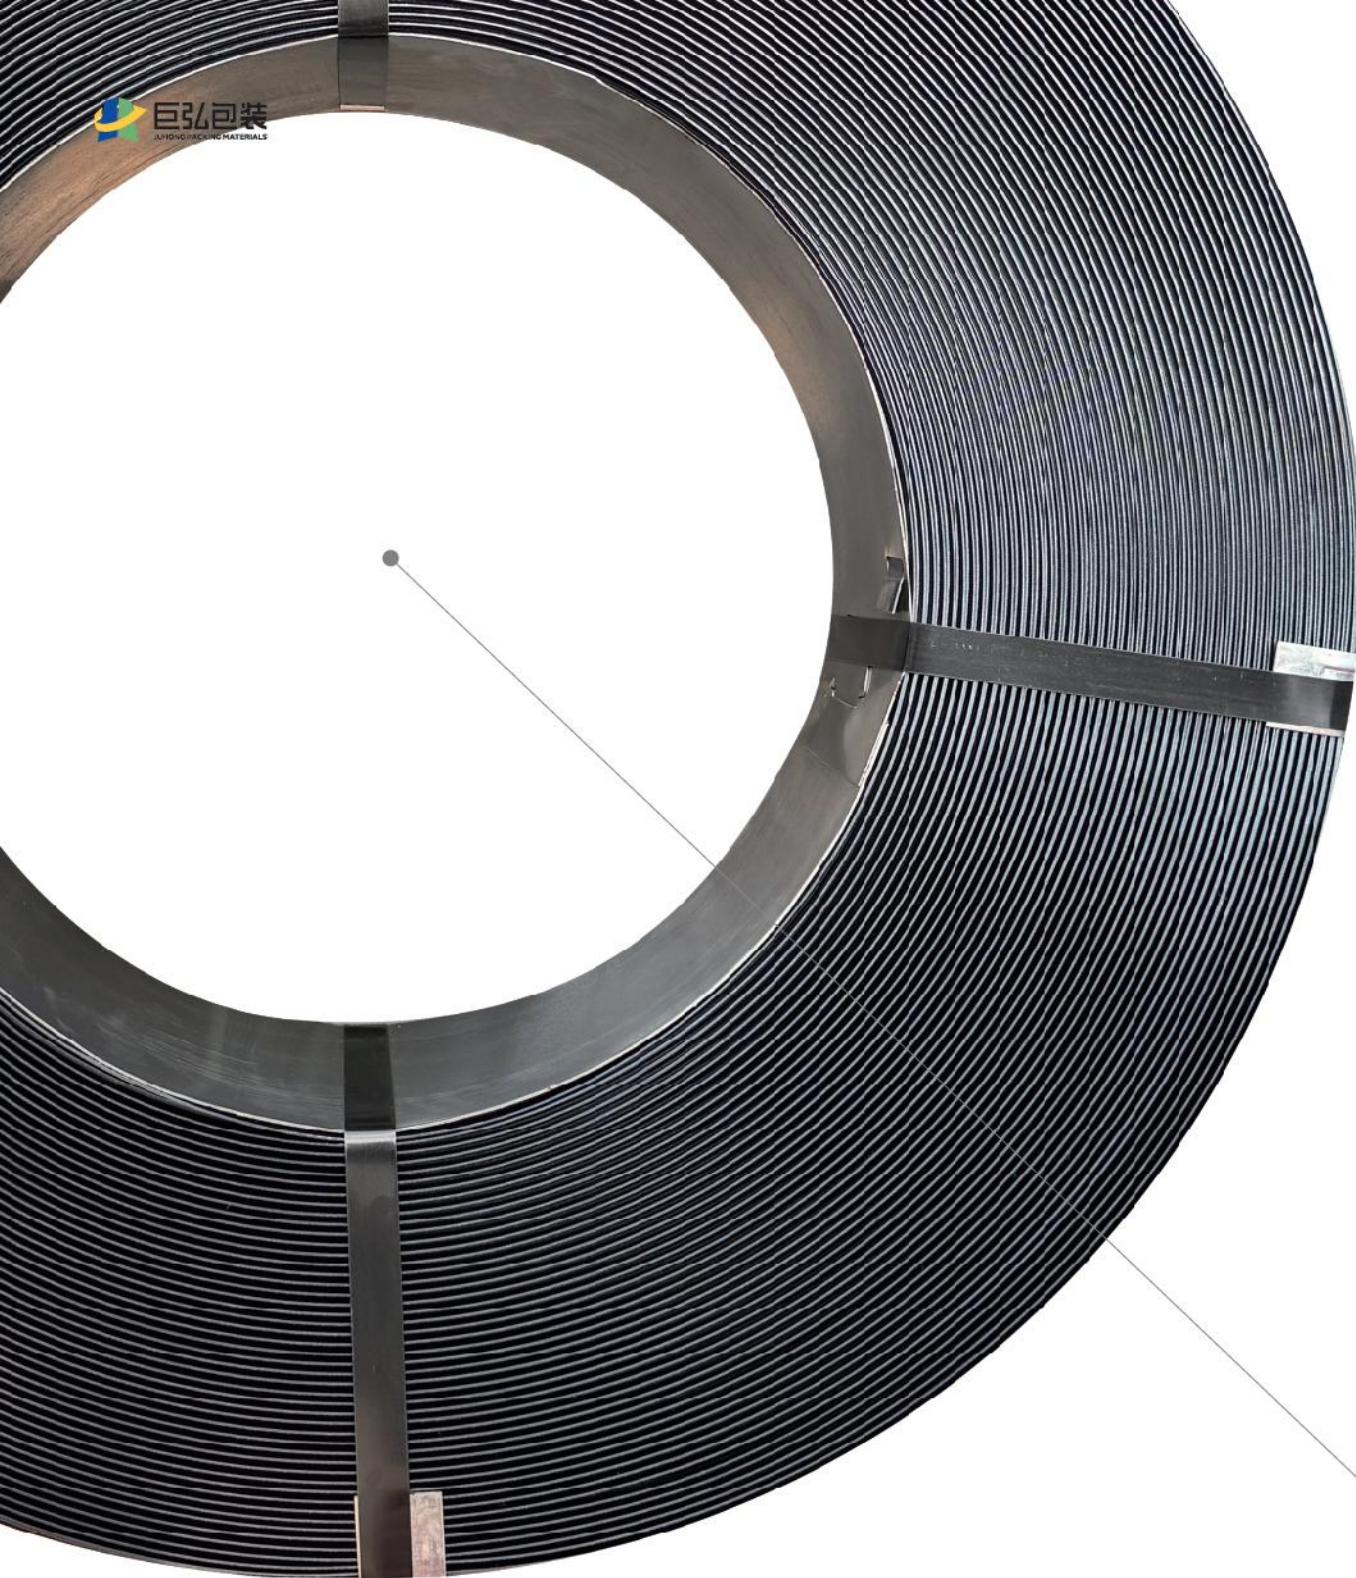

## 适配各种打包机 FITS DIVERSE STRAPPING MACHINE


钢带打包带，兼容手动、气动及全自动设备，实现快速、牢固、可靠的打包效果。  
Strapping bands that work with hand, pneumatic, or fully-auto machines—delivering fast, strong, and reliable performance.



泰坦  
Titan



信诺  
Signode




钢钣  
Kohan Kogyo



西马克  
SMS



森德斯  
SUND BIRSTA



派克威  
Packway



捷锐  
Generica



泰尔  
Taier

## 服务多元化行业 SERVING DIVERSE INDUSTRIES

并深受信赖，涉及多个领域  
TRUSTED AND APPLIED ACROSS  
NUMEROUS SECTORS

- 钢卷 Steel coil
- 线材 Steel Wire
- 有色金属 Non-Ferrous Metal
- 玻璃 Glass
- 木材 Lumber
- 建材 Construction Materials
- 物流 Logistics



玻璃  
Glass




电解铜  
Electrolytic Copper



钢卷  
Steel Coil



木框架  
Wooden Frame



线缆  
Steel Wire



钢管  
Steel Tube



有色金属锭  
Non Ferrous Ingot

## 搭接方式 JOINT METHOD

通用性强，可靠适配多种连接方式与打包机，保障高效稳定。  
Universal and reliable—compatible with multiple joint types and strapping machines  
for efficient, stable performance.



打包扣连接  
Seal joint





点焊免扣连接  
Spot-weld sealless joints



模切免扣连接  
Die-cut sealless joints

## 包装 PACKAGING

- 可选单片包装或常规包装
- 单独包装卷采用 VCI 防锈纸缠绕
- 固定于出口木托盘或铁托盘上
- 托盘外覆 VCI 防锈膜，内置干燥剂
- 最外层可选棕色 / 白色 VCI 防锈纸或瓦楞护套
- Individual or non-individual packing
- Individual pack wrapped in VCI anti-rust paper
- Coils secured on wooden or iron pallet
- Covered with VCI film, with desiccants inside
- Outer layer: brown/white VCI paper or corrugated sleeve



PET 打包带  
PET STRAPPING


PET 规格表 PET SPECIFICATION

| 宽度<br>Width |          | 厚度范围<br>Thickness Range |                      | 拉力范围<br>Break Range  |                      | 常用规格                       |
|-------------|----------|-------------------------|----------------------|----------------------|----------------------|----------------------------|
| 英寸<br>in    | 毫米<br>mm | 英寸<br>in                | 毫米<br>mm             | 千克<br>kg             | 牛<br>N               | Best Selling<br>Dimensions |
|             |          | 最小 - 最大<br>min - max    | 最小 - 最大<br>min - max | 最小 - 最大<br>min - max | 最小 - 最大<br>min - max | mm                         |
| 3/8         | 9        | 0.021-0.024             | 0.5 - 0.8            | 157- 360             | 1540 - 3550          | 9*0.6                      |
| 1/2         | 10       | 0.021-0.024             | 0.5 - 0.8            | 175 - 400            | 1715 - 3920          | 10*0.5                     |
|             | 11       | 0.021-0.040             | 0.5 - 0.8            | 192 - 440            | 1880 - 4300          | 11*0.6                     |
|             | 12       | 0.021-0.040             | 0.5 - 1.0            | 210 - 600            | 2050 - 5880          | 12*0.6/0.7                 |
|             | 13       | 0.021-0.040             | 0.5 - 1.0            | 227 - 650            | 2230 - 6370          | 13*0.6                     |
| 5/8         | 15       | 0.021-0.040             | 0.5 - 1.0            | 210 - 750            | 2000 - 7350          | 15*0.8                     |
|             | 16       | 0.021-0.050             | 0.5 - 1.2            | 225 - 960            | 2200 - 9400          | 16*0.8/0.9/1.0             |
| 3/4         | 19       | 0.031-0.055             | 0.8 - 1.4            | 420 - 1330           | 4170 -13030          | 19*0.8/1.0/1.2             |
| 1           | 25       | 0.031-0.055             | 0.8 - 1.4            | 700 - 1750           | 6860 -17150          | 25*1.0/1.2                 |
| 1 1/4       | 32/31.75 | 0.031-0.055             | 0.8 - 1.4            | 880 - 2240           | 8710 - 21950         | 32*1.0/1.2                 |






### 表面 SURFACE



压纹  
Embossed



光面  
Smooth



- 轻便灵活，操作简单方便。  
Lightweight and flexible, easy and convenient to handle.



- 不生锈，不会对产品造成损伤。  
Rust-free and non-damaging to packaged products.



- 可配合全自动打包机、电动打包机、气动打包机及打包扣使用。  
Compatible with fully auto/battery-powered/pneumatic machines, and seals.



- 可根据客户需求生产不同规格和长度。  
Available in various dimensions and lengths tailored to customer requirements.



- 100% 可回收再利用，绿色环保。  
100% recyclable and environmentally friendly.

### 颜色 COLOR


- 绿色  
Green
- 黑色  
Black
- 白色  
White
- 定制颜色  
Customized color



### 搭接方式 JOINT METHOD



打包扣  
Seal



摩擦热熔  
Friction-welded



热刀热熔  
heat-sealed(hot knife)

## 适配所有打包机 COMPATIBLE WITH DIVERSE STRAPPING PACKING SYSTEM

全面适配各类打包机，从手动、电动、气动到全自动，始终保持高效与可靠，助力畅快打包。  
Seamlessly compatible with diverse strapping machine—from manual, battery powered, pneumatic to fully automatic—ensuring fast, reliable performance for effortless packaging.



意达拓思  
ITATOOLS



欧嘉派克  
ORGAPACK



气动打包机  
PNEUMATIC TOOL



弗洛姆  
FROMM



意帝派克  
ITIPACK




信诺  
SIGNODE



赛克  
CYKLOP



捷锐  
GENERICA

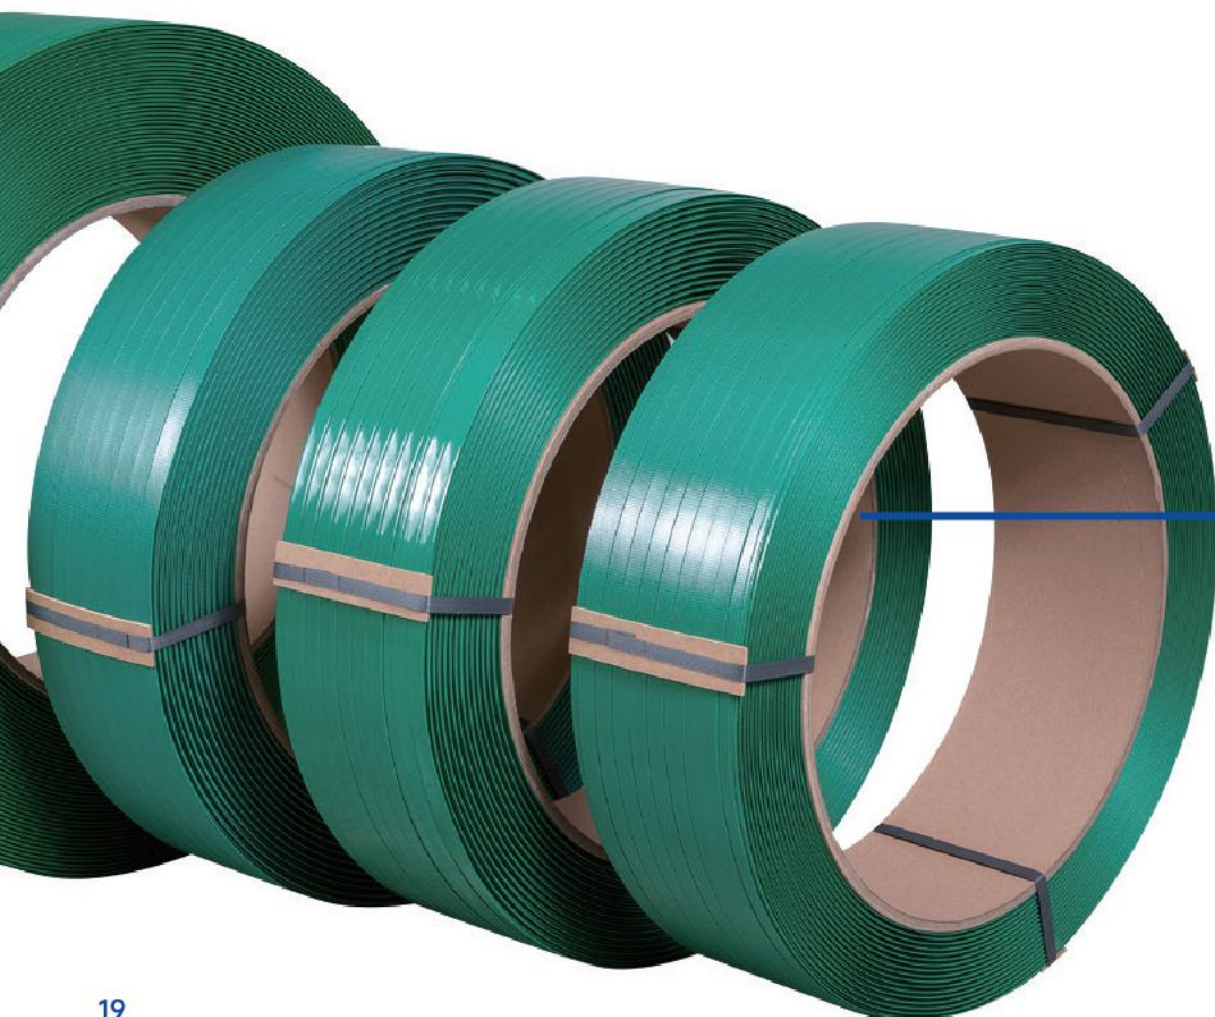

## 应用行业 APPLICATION INDUSTRY

各行业信赖  
Trusted Across Industries

巨弘 PET 打包带以稳定可靠的性能，广泛应用于棉花包、砖石、有色金属锭、瓶罐、纸类、金属卷、木材、管材及玻璃制品包装，长期赢得客户信赖与合作。  
Juhong PET strapping, known for its reliable performance, is trusted in packaging cotton bale, bricks, non-ferrous ingots, bottles, paper, metal coils, lumber, pipes, and glass products, securing lasting customer partnerships.



棉花  
Cotton Bale



砖石  
Brick



有色金属锭  
Non Ferrous Ingot



瓶罐  
Bottle



纸卷  
Paper Roll



金属卷  
Steel Coil



木材  
Timber




管材类  
Pipe




玻璃  
Glass

PET 打包带循环流程  
PET STRAPPING CIRCULAR PROCESS


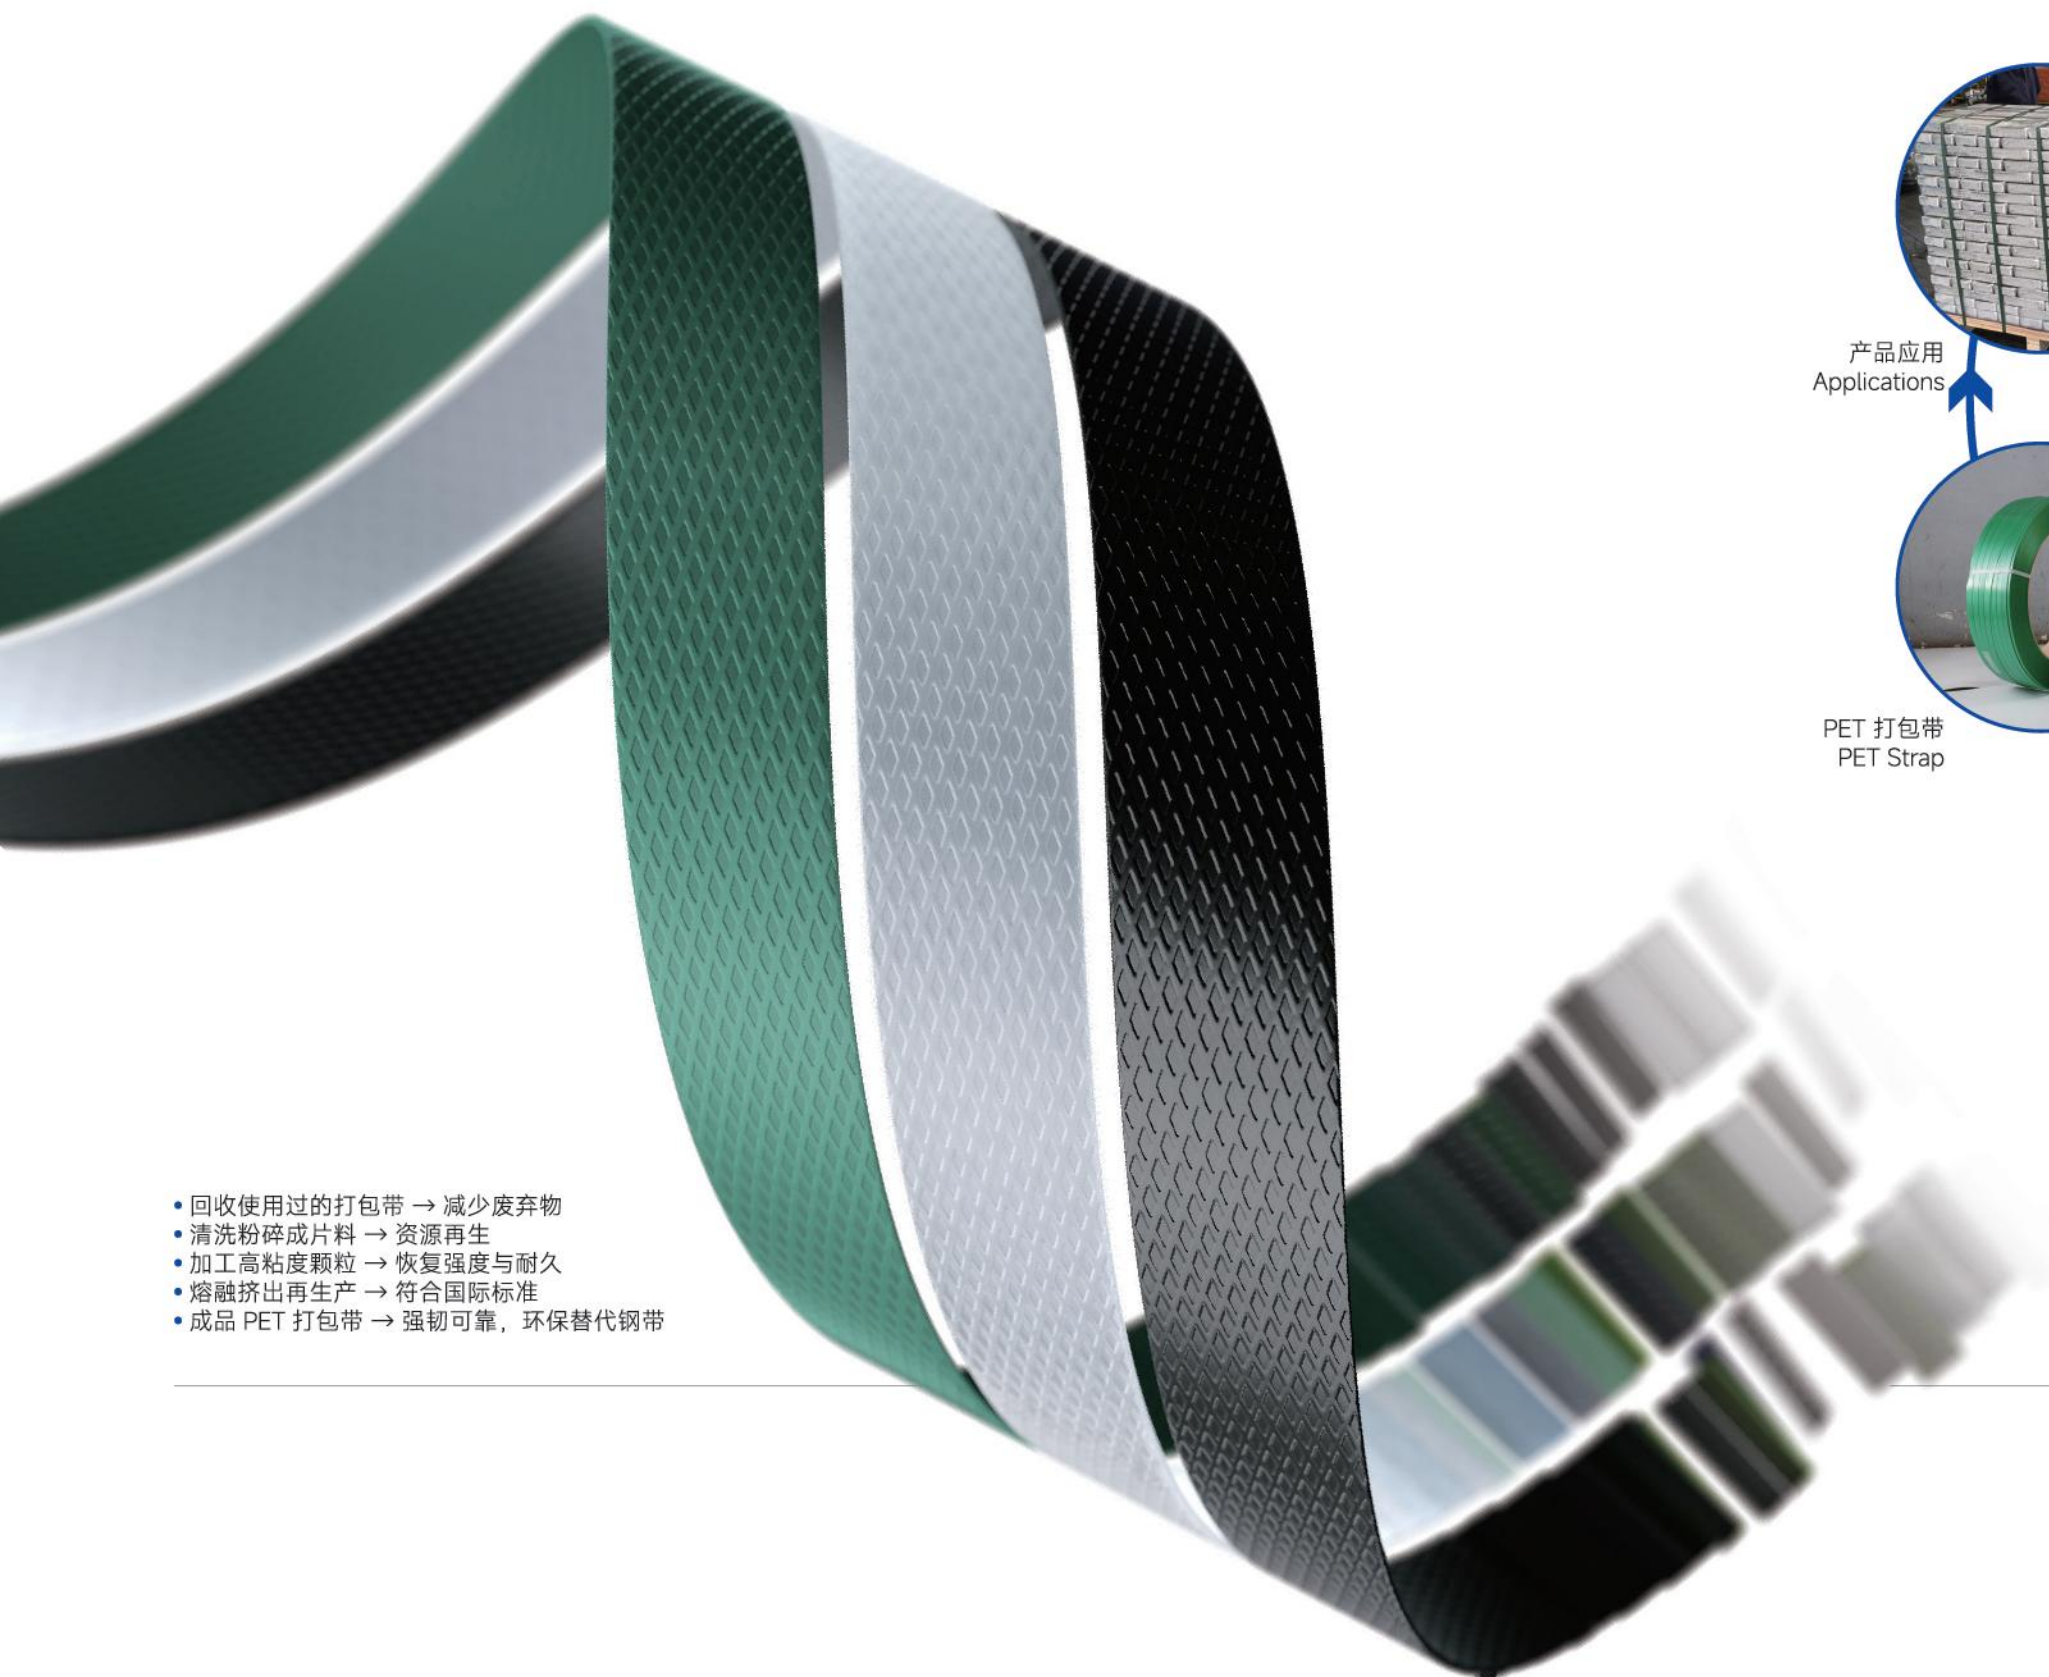


- 回收使用过的打包带 → 减少废弃物
- 清洗粉碎成片料 → 资源再生
- 加工高粘度颗粒 → 恢复强度与耐久
- 熔融挤出再生产 → 符合国际标准
- 成品 PET 打包带 → 强韧可靠，环保替代钢带

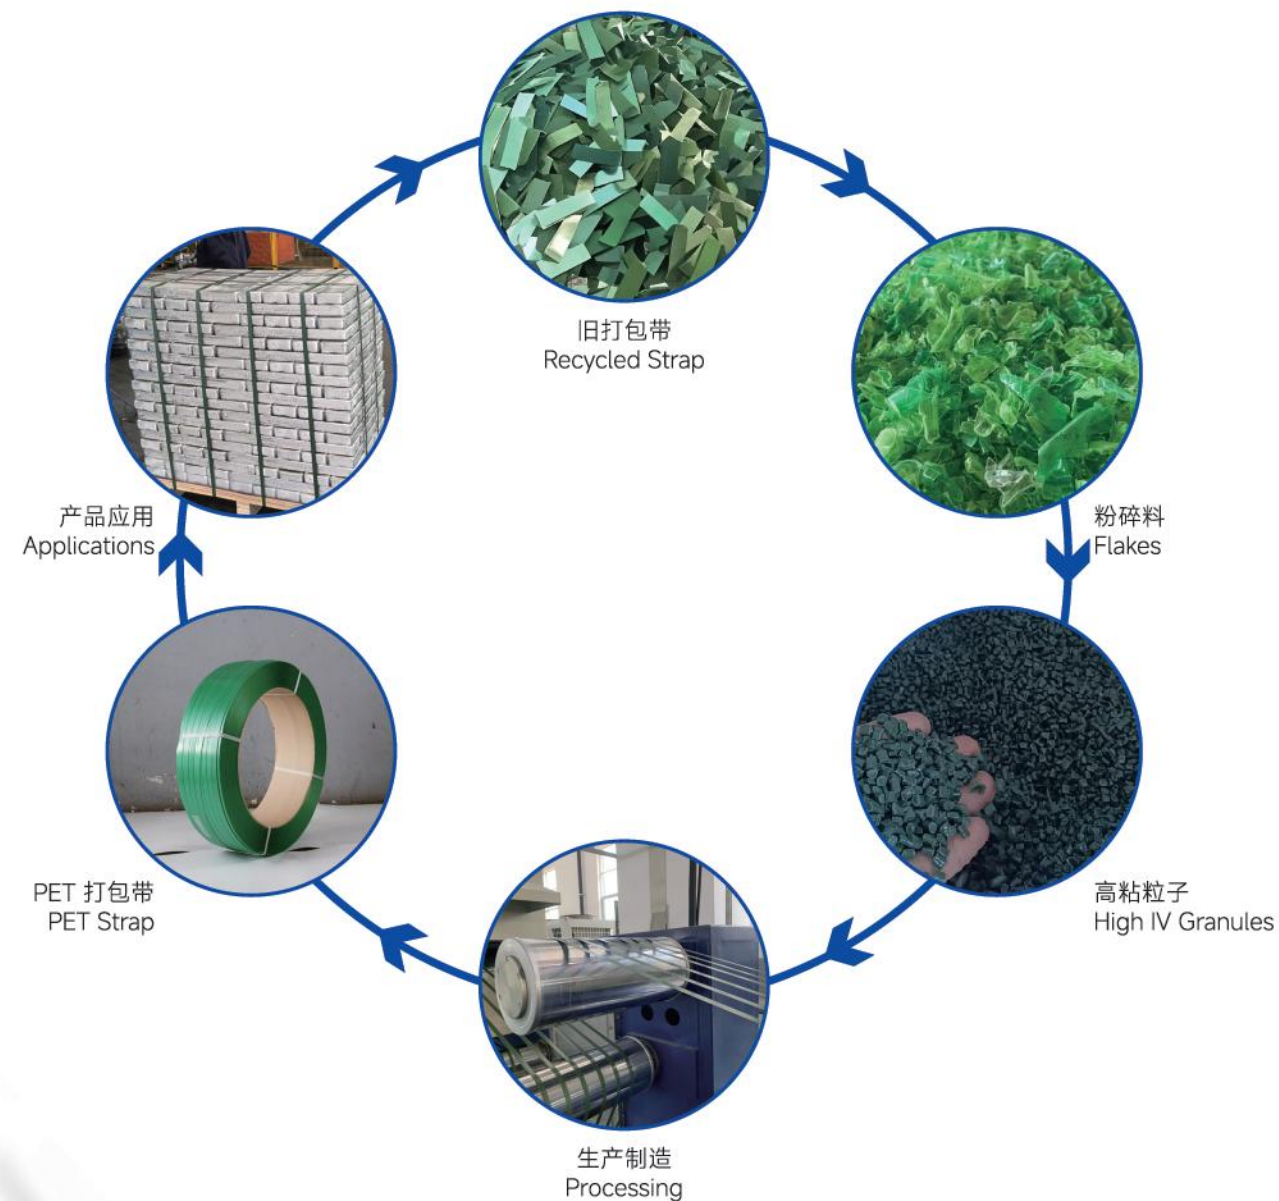

- Collection → Used straps recovered, waste reduced
- Flakes → Cleaned & shredded for reuse
- High IV Granules → Strength & durability restored
- Extrusion → Manufactured to global standards
- Finished Strap → Tough, reliable & eco-friendly steel alternative

包装方式 PACKAGING

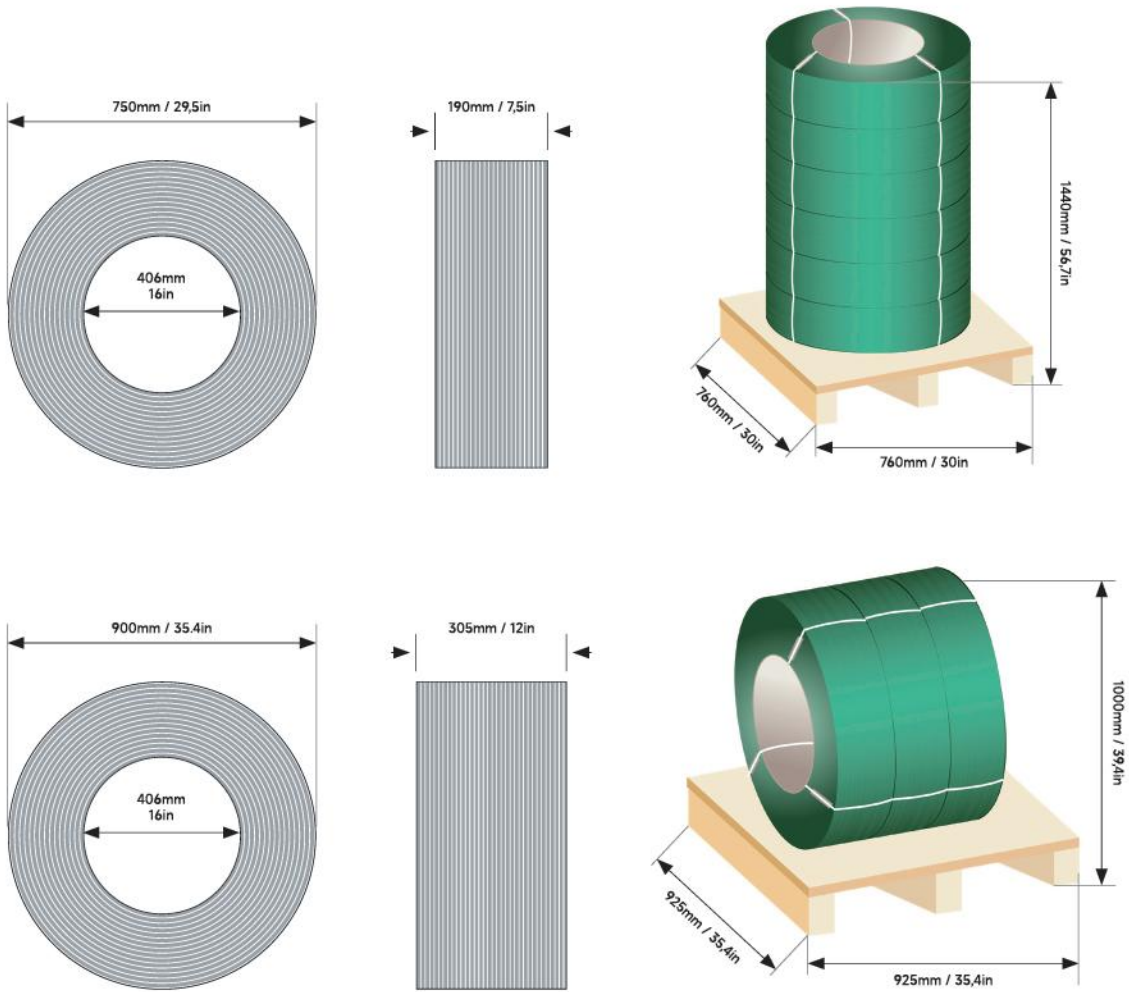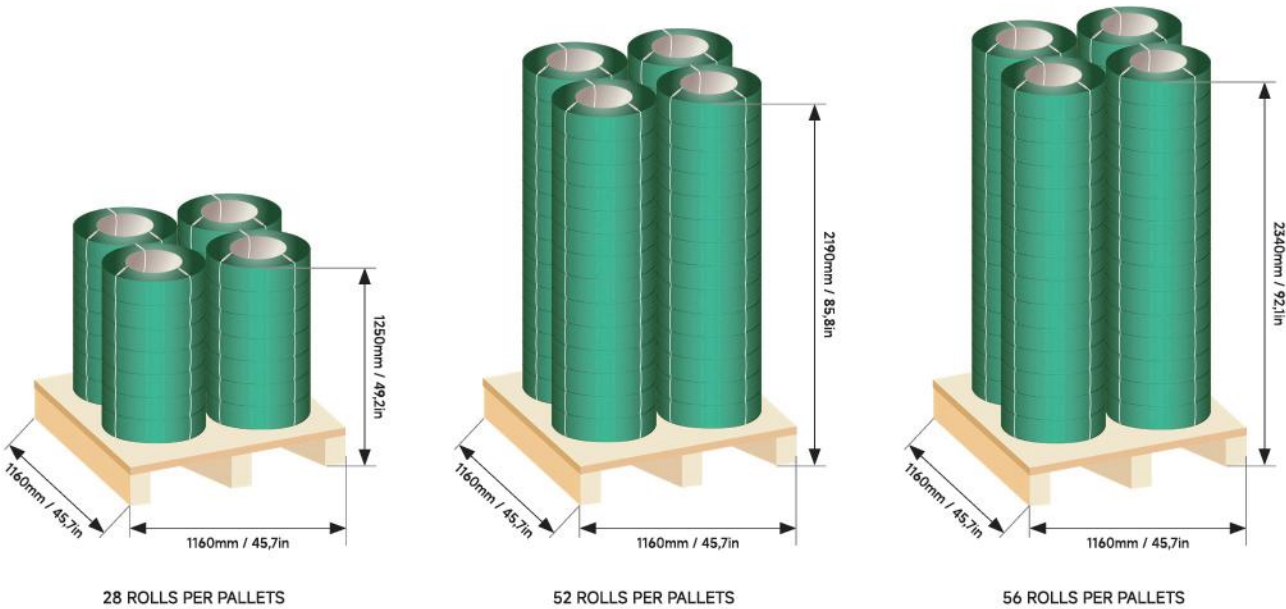

我们的 PET 打包带通常为每托 28 卷、52 卷、56 卷或 60 卷包装，方便运输与储存。同时，我们可以根据客户的仓储条件以及品牌宣传需求，提供灵活的定制包装方案，既实用又能提升品牌形象。

Our PET strapping is typically packed in 28, 52, 56, or 60 rolls per pallet for convenient storage and transport. We also provide flexible customized packaging solutions tailored to customers' storage conditions and branding needs, combining practicality with enhanced brand presentation.

| 重量 / 卷<br>Weight /Rolls | 10 kgs              | 20 kgs               | 70 kgs                 | 330 kgs              | 1000 kgs               | 切带棉花带<br>Cut Cotton Strap |
|-------------------------|---------------------|----------------------|------------------------|----------------------|------------------------|---------------------------|
| 纸芯规格<br>Core Dimensions | 406x76 mm<br>(16x3) | 406x150 mm<br>(16x6) | 406x190 mm<br>(16x7.5) | 406x305mm<br>(16x12) | 406x1000 mm<br>(16x39) | /                         |
| 卷 / 托盘<br>Rolls/Pallet  | 48/52 卷             | 28/32/52/56/60 卷     | 6 卷                    | 3 卷                  | 1 卷/托                  | 定制                        |
|                         | 48/52 rolls         | 28/32/52/56/60 rolls | 6 rolls                | 3 rolls              | 1 roll/pallet          | Customized                |

打包扣  
STEEL SEAL



打包扣 STEEL SEAL

| 锁扣类型<br>Seal Type | 带宽<br>Strap Width | 锁扣长 * 厚<br>Seal L * T | 带宽<br>Strap Width | 锁扣长 * 厚<br>Seal L * T |
|-------------------|-------------------|-----------------------|-------------------|-----------------------|
|                   | 英寸 in             | 英寸 in                 | 毫米 mm             | 毫米 mm                 |
| 闭式扣<br>Push Type  | 1/2               | 0.86*.023             | 12.7              | 22*0.6                |
|                   | 5/8               | 0.86*.023             | 16                | 22*0.6                |
|                   |                   | 0.98*.023             |                   | 25*0.6                |
|                   | 3/4               | 0.86*.023             | 19                | 22*0.6                |
|                   |                   | 0.98*.023             |                   | 25*0.6                |
|                   |                   | 1.26*.023             |                   | 32*0.6                |
|                   |                   | 1.57*.023             |                   | 40*0.6                |
|                   |                   | 1.57*.028             |                   | 40*0.7                |
|                   |                   | 1.77*.028             |                   | 45*0.7                |
|                   |                   | 1.77*.031             |                   | 45*0.8                |
|                   |                   | 1.77*.035             |                   | 45*0.9                |
|                   |                   | 1.89*.031             |                   | 48*0.8                |
|                   |                   | 1.89*.035             |                   | 48*0.9                |
|                   |                   | 2*.035                |                   | 50*0.9                |
|                   |                   | 2.16*.035             |                   | 55*0.9                |
|                   |                   | 2.24*.035             |                   | 57*0.9                |
|                   | 1                 | 1.89*.031             | 25                | 48*0.8                |
|                   |                   | 1.89*.035             |                   | 48*0.9                |
|                   |                   | 2*.035                |                   | 50*0.9                |
|                   | 1 1/4             | 1.5*.035              | 32/31.75          | 38*0.9                |
|                   |                   | 1.57*.028             |                   | 40*0.7                |
|                   |                   | 1.77*.028             |                   | 45*0.7                |
|                   |                   | 1.77*.031             |                   | 45*0.8                |
|                   |                   | 1.77*.035             |                   | 45*0.9                |
|                   |                   | 1.89*.028             |                   | 48*0.7                |
|                   |                   | 1.89*.031             |                   | 48*0.8                |
|                   |                   | 1.89*.035             |                   | 48*0.9                |
|                   |                   | 2*.035                |                   | 50*0.9                |
|                   |                   | 2.16*.028             |                   | 55*0.7                |
|                   |                   | 2.08*.035             |                   | 53*0.9                |
|                   |                   | 2.16*.035             |                   | 55*0.9                |
|                   |                   | 2.24*.035             |                   | 57*0.9                |
|                   |                   | 2.95*.035             |                   | 75*0.9                |


| 锁扣类型<br>Seal Type   | 带宽<br>Strap Width | 锁扣长 * 厚<br>Seal L * T | 带宽<br>Strap Width | 锁扣长 * 厚<br>Seal L * T |
|---------------------|-------------------|-----------------------|-------------------|-----------------------|
|                     | 英寸 in             | 英寸 in                 | 毫米 mm             | 毫米 mm                 |
| 防滑扣<br>Serrated     | 3/4               | 1.02*.028             | 19                | 26*0.7                |
|                     |                   | 1.10*.023             |                   | 28*0.6                |
|                     | 5/8               | 1.02*.028             | 16                | 26*0.7                |
|                     |                   | 1.10*.023             |                   | 28*0.6                |
|                     | 1/2               | 1.02*.028             | 12.7              | 26*0.7                |
|                     |                   | 1.10*.023             |                   | 28*0.6                |
| 半闭式<br>Open-flange  | 1                 | 2.16*.035             | 25                | 55*0.9                |
|                     | 1 1/4             | 2.16*.035             | 32/31.75          | 55*0.9                |
| 半开式<br>Thread-on    | 3/4               | 2.16*.035             | 19                | 55*0.9                |
|                     | 1 1/4             | 1.57*.028             | 32/31.75          | 40*0.7                |
|                     |                   | 1.77*.031             |                   | 45*0.8                |
|                     |                   | 1.77*.028             |                   | 45*0.7                |
|                     |                   | 1.89*.035             |                   | 48*0.9                |
|                     |                   | 2*.035                |                   | 50*0.9                |
| 开式<br>Snap-on       | 1/2               | 1.26*.023             | 12.7              | 32*0.6                |
|                     | 5/8               | 1.26*.023             | 16                | 32*0.6                |
|                     | 3/4               | 1.26*.023             | 19                | 32*0.6                |
| 自动排扣<br>Magazine    | 3/4               | 1.10*.023             | 19                | 28*0.6                |
|                     | 1 1/4             | 1.5*.031              | 32/31.75          | 38*0.8                |
|                     |                   | 1.5*.040              |                   | 38*1.0                |
|                     |                   | 1.57*.040             |                   | 40*1.0                |
|                     |                   | 2*.040                |                   | 50*1.0                |
|                     |                   | 2*.043                |                   | 51*1.1                |
|                     | 2                 | 2.95*.040             | 50                | 75*1.0                |
|                     |                   | 2.95*.05              |                   | 75*1.2                |
| 十字扣<br>Cross-shaped | 1 1/4             | 5.8*.035              | 32/31.75          | 148*0.9               |
| 直角扣<br>Right-angle  | 1 1/4             | 0.035                 | 32/31.75          | 0.7                   |

品类齐全 COMPLETE RANGE

钢带、塑料带专用打包扣一应俱全，涵盖闭式、开式、半开式、半闭式、自动排扣、防滑扣等多种类型，满足各类打包需求。  
Comprehensive seals for both steel and plastic strapping, including Push, Snap-on, Thread-on, Open-flange, Magazine, and Serrated types—covering varied packaging need.

个性定制 CUSTOM BRANDING


支持冲压 LOGO 与外包装定制，提升品牌形象，打造更专业的包装方案。  
Logo stamping and packaging customization available to elevate brand identity and deliver a more professional packaging solution.




开式扣  
Snap on Seal




闭式扣  
Push Seal

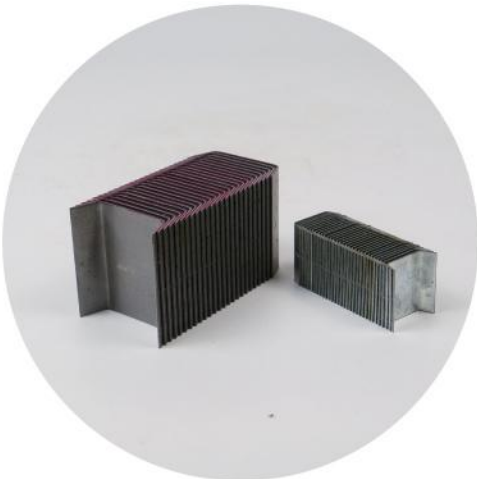


机用锁扣（自动扣）  
Magazine Seal



半开式  
Thread-on Seal



半闭式  
Open-flange Seal



防滑扣 Serrated Seal  
(点状 Dotted)



防滑扣  
Serrated Seal

缠绕膜  
STRETCH FILM



| 系列<br>Series     | 膜层数<br>Film Layer | 特征<br>Characteristics                                                                                                                                                                                                                                                  | 颜色<br>Colour                                                     |
|------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| 极科 11<br>Xtr11   | 11 层<br>11-layer  | 出色的防穿刺和抗撕裂性能<br>Outstanding durability against punctures and tears<br>11 层不同材质交叉形成多层加固结构<br>Robust, Multi-layer cross-reinforced structure<br>运输过程中更佳的载荷稳定性<br>Improved load stability during transport<br>高性价比的产品表现<br>Cost-efficient performance<br>首选<br>Top choice | 透明<br>Transparent                                                |
| 优智 7<br>Optima 7 | 7 层<br>7-layer    | 可靠的防穿刺和抗撕裂性能<br>Reliable puncture and tear resistance<br>多层交叉加固结构<br>Layered cross-reinforced structure<br>更佳的载荷稳定性<br>Enhanced load stability<br>性价比高且实用 Cost-efficient and practical                                                                                 | 透明，黑色，白色，定制颜色<br>Transparent, black, white,<br>customized colour |
| 基础 5<br>Base 5   | 5 层<br>5-layer    | 良好的防穿刺和抗撕裂性能<br>Strong puncture and tear resistance<br>良好的伸展性<br>Good stretchability<br>性价比产品<br>Cost-effective solution<br>环保设计<br>Eco-friendly design<br>热销款<br>Popular Choice                                                                                       | 透明，黑色，白色，定制颜色<br>Transparent, black, white,<br>customized colour |

应用场景  
APPLICATION  
SCENARIOS



玻璃瓶  
Bottle



仓储物流  
Warehouse & Logistic



罐头  
Can



石膏板  
Gypsum board



纸卷  
Paper



玻璃  
Glass




轮毂  
Wheel Hub

# FITS DIVERSE WRAPPING MACHINE



转盘式  
Turntable Wrapper

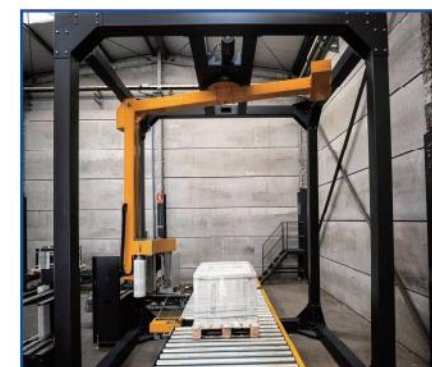


旋臂式  
Rotary Arm Wrapper



环轨式  
Ring Wrapper



水平式  
Horizontal Wrapper/Orbital Wrapper

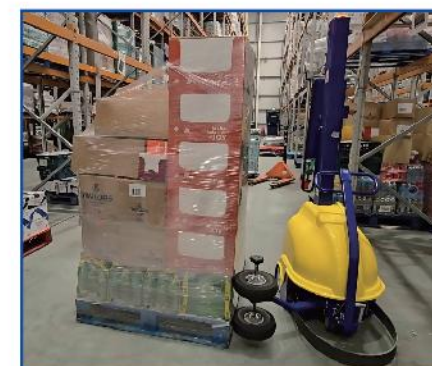

机器人  
Robot Wrapper



在线式  
In-line Wrapper

手用膜 HAND FILM

手用拉伸膜用于人工包装，厚度 8-35 微米，宽度 250、400、450、500 毫米，可满足不同需求。  
Hand stretch film for manual wrapping, available in 8-35 µm thickness and widths of 250, 400, 450, and 500 mm to suit various needs.



|                    |             |             |                                                      |
|--------------------|-------------|-------------|------------------------------------------------------|
| 厚度 Thickness       | 8-11 µm     | 12 µm       | 15-35 µm                                             |
| 宽度 Width           | 100-500 mm  | 100-500 mm  | 100-500 mm                                           |
| 净重 Net weight      | 0.7-4kgs    | 0.7-4kgs    | 0.7-8kg                                              |
| 延伸性 Stretchability | 120-200%    | 150%-250%   | 150%-500%                                            |
| 颜色 Colour          | Transparent | Transparent | Transparent, black, white, blue and customized color |

迷你膜 MINI WRAP

迷你膜是手用拉伸膜中最小规格，也称迷你卷。适用于不同尺寸货物的缠绕与捆绑。可选通用型或左右手专用型，特点是小巧便捷、操作简单。  
Mini wrap is the smallest type of hand stretch film, also known as mini roll. It is ideal for wrapping and bundling loads of different sizes. Offered in universal and left/right-handed versions, it is compact and easy to use.



|                |                                                                            |
|----------------|----------------------------------------------------------------------------|
| 厚度 Thickness   | 8-35 µm                                                                    |
| 宽度 Width       | 100,125mm                                                                  |
| 延伸性 Elongation | 120-250%                                                                   |
| 颜色 Colour      | 透明，黑色，白色，蓝色和其他定制颜色<br>Transparent, black, white, blue and customized color |

机用缠绕膜 MACHINE STRETCH FLIM

机用拉伸膜适用于各类缠绕机，实现快速全自动包装，广泛应用于制造和物流。  
Machine stretch film fits diverse wrapping machines, enabling fast auto wrapping and widely used in manufacturing and logistics.



|                |            |            |            |
|----------------|------------|------------|------------|
| 厚度 Thickness   | 8-9µm      | 10-11µm    | 12µm       |
| 宽度 Width       | 250-2000 m | 250-2000 m | 250-2000 m |
| 净重 Net weight  | 5-25 kg    | 5-25 kg    | 5-25 kg    |
| 延伸性 Elongation | 120-180 %  | 120-250 %  | 120-250 %  |

|                |            |            |            |           |
|----------------|------------|------------|------------|-----------|
| 厚度 Thickness   | 15-16µm    | 17-23µm    | 30-35µm    | 40-50µm   |
| 宽度 Width       | 250-2000 m | 250-2000 m | 250-2000 m | 250-2000m |
| 净重 Net weight  | 5-25 kg    | 5-25 kg    | 5-25 kg    | 5-25kg    |
| 延伸性 Elongation | 150-400 %  | 150-500%   | 150-500%   | 150-500%  |

母卷缠绕膜 JUMBO STRETCH FLIM

母卷拉伸膜主要供分切商使用，再分卷成适用于手用和机用的小卷。  
Jumbo stretch film is mainly supplied to converters, who rewind it into smaller rolls for manual and machine use.



|                |                    |                    |                    |
|----------------|--------------------|--------------------|--------------------|
| 厚度 Thickness   | 8-9 µm             | 10-11 µm           | 12 µm              |
| 宽度 Width       | 250,400,450,500 mm | 250,400,450,500 mm | 250,400,450,500 mm |
| 净重 Net weight  | 25-58kgs           | 25-58kgs           | 25-58kgs           |
| 延伸性 Elongation | 120-200%           | 150%-250%          | 150%-250%          |
| 颜色 Colour      | 透明 Transparent     | 透明 Transparent     | 透明 Transparent     |

|               |                |                                                                          |            |
|---------------|----------------|--------------------------------------------------------------------------|------------|
| 厚度 Thickness  | 15-16 µm       | 17-23 µm                                                                 | 30-35 µm   |
| 宽度 Width      | 100-500 mm     | 100-500 mm                                                               | 100-500 mm |
| 净重 Net weight | 25-58kgs       | 25-58kgs                                                                 | 25-58kgs   |
| 延伸性 El        | 150-400%       | 150-500%                                                                 | 150%-500%  |
| 颜色 Colour     | 透明 Transparent | 透明，黑色，白色，蓝色和定制颜色<br>Transparent, black, white, blue and customized color |            |

## 客户 CUSTOMERS



宝武集团  
BAOWU



浦项  
POSCO



安赛乐米塔尔  
ARCELORMITTAL



永青  
ETERNAL TSINGSHAN



信义玻璃  
XINYI GLASS



金光纸业  
APP



圣戈班  
SAINT-GOBAIN



北新建材  
CNBM



福耀玻璃  
FUYAO GLASS



天合光能  
TRINA SOLAR



紫金矿业  
ZIJIN MINING



江西铜业  
JIANGXI COPPER



雪花啤酒  
SNOW



中国铝业  
CHALCO



盛虹控股集团  
SHENG HONG HOLDING GROUP




当升科技  
EASPRING



REACH  
ROHS  
MSDS  
PPWR  
PFAS



ISO9001  
ISO14001  
ISO45001



AAR  
(钢带 Steel Strap)  
(塑钢带 PET Strap)

## 证书 CERTIFICATION

