



JUHONG

PRODUCT CATALOG

产品目录

联系方式

邮箱: sales@jhstrapping.com

手机: +86 17826135709

官网: www.jhstrapping.com

地址: 江苏省常州市钟楼区邹区镇卜弋友谊北路 32 号

CONTACT

Email: sales@jhstrapping.com

Phone: +86 17826135709

Website: www.jsjhpackaging.com

Address: No.32 North Youyi Road, Zouqu, Zhonglou, Changzhou, Jiangsu, China

目录 CONTENTS

公司历史	3
------	---

COMPANY HISTORY

钢带	5
----	---

STEEL STRAPPING

PET 打包带	15
---------	----

PET STRAPPING

打包扣	25
-----	----

STEEL SEAL

缠绕膜	29
-----	----

STRETCH FILM

证书	35
----	----

CERTIFICATION

客户	36
----	----

CUSTOMERS



公司历史

COMPANY HISTORY



1997

- 成立常州市武进卜弋通达冲件厂（巨弘包装前身）
Established Changzhou Wujin Buyi Tongda Stamping Plant(the predecessor of Juhong Packing Materials)

1999

- 成功研发自动排扣
Successfully developed magazine strapping seal.

2005

- 获得“江苏质量信得过产品”荣誉证书
Awarded the honorary certificate of “Jiangsu Quality Trustworthy Product.”

2009

- 获得“常州市民营科技企业”认定证书，“江苏省民营科技企业”认定证书
Obtained the recognition certificates of “Private Science and Technology Enterprise of Changzhou City” and “Private Science and Technology Enterprise of Jiangsu Province.”

2010

- 江苏巨弘捆带制造有限公司成立
Jiangsu Juhong Strapping Manufacturing Co., Ltd. established

2011

- PET 打包带投产，钢带投产
Started production of PET strapping and steel strapping

2014

- 专利证书注册完成
Patent registered
- 一种去除冷轧钢带切边毛刺装置
Device for Removing Burrs from Steel Strap Edges
- 一种自动排扣
Automatic Magazine strapping seal
- 荣获江苏省科学技术厅颁发的“国家高新技术企业证书”
Awarded the “National High-tech Enterprise Certificate issued by the Jiangsu Provincial Department of Science and Technology.

2015

- “巨弘”商标注册成功
The trademark “Juhong” successfully registered
- 成立常州市高强度合金捆带工程技术研究中心
Established the Changzhou High-strength steel Strapping Engineering Technology Research Center.
- 新增钢带产线，月产能由 1000 吨增至 5000 吨。
New steel strapping line added, boosting monthly capacity from 1,000 to 5,000 tons.

2017

- PET 产线扩至 3 条，月产能由 150 吨增至 600 吨。
Expanded PET lines to three, boosting capacity from 150 to 600 tons/month.

2018

- 厂区面积由 6,000 m²扩至 20,000 m²。
Plant area enlarged from 6,000 m² to 20,000 m².

2021

- PE 缠绕膜投产
Started production of PE Stretch film

2022

- PET 打包带通过美国铁路协会 (AAR) 认证
PET strapping obtained AAR certification

2025

- 公司名由“江苏巨弘捆带制造有限公司”升级为“巨弘包装材料(江苏)有限公司”。
Upgraded name from Jiangsu Juhong Strapping Manufacturing Co.,Ltd. To Juhong Packing Materials Jiangsu Co., Ltd.
- 高强度钢带通过美国铁路协会 (AAR) 认证
High tensile steel strapping obtained AAR certification
- 获评国家级专精特新“小巨人”企业
Recognized as a National Specialized and Innovative “Little Giant” Enterprise
- 第4条缠绕膜生产线正式投产
The 4th stretch film production line was officially put into operation
- 第4条PET打包带生产线正式投产
The 4th PET strapping production line was officially put into operation

2026

- 第3条钢带生产线正式投产
The 3rd steel strapping production line was officially put into operation

钢带
STEEL STRAPPING

钢带规格表 STEEL STRAP SPECIFICATION


巨弘包装材料				Terra 砥石系列			Ridge 掌岭系列			Pivot 星枢系列			Duro 峰极系列			Nexa 穹界系列			JUHONG PACKING MATERIALS		
宽度 Width		厚度 Thickness		拉力 Strength			拉力 Strength			拉力 Strength			拉力 Strength			拉力 Strength			长度 / 单位重量 Length/Weight		卷型 Coil Winding
英寸 in	毫米 mm	英寸 in	毫米 mm	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	英尺 / 磅 ft/lb	米 /kg m/kg	
1/2	12.7	0.015	0.38	706	3137	650	/	/	/	/	/	/	/	/	/	/	/	/	39.2	26.5	M/R
1/2	12.7	0.020	0.51	947	4210	650	1093	4858	750	1209	5376	830	1355	6024	930	1428	6347	980	29.4	19.8	M/R/O/J
1/2	12.7	0.023	0.58	1077	4788	650	1243	5525	750	1375	6114	830	1541	6850	930	1624	7219	980	25.6	17.2	M/R/O/J
5/8	16	0.015	0.38	889	3952	650	/	/	/	/	/	/	/	/	/	/	/	/	29.6	20.0	M/R
5/8	16	0.020	0.51	1193	5304	650	1377	6120	750	1524	6773	830	1707	7589	930	1799	7997	980	23.6	15.9	M/R/O/J
5/8	16	0.023	0.58	1357	6032	650	1566	6960	750	1733	7702	830	1941	8630	930	2046	9094	980	20.5	13.8	M/R/O/J
3/4	19	0.020	0.51	1417	6299	650	1635	7268	750	1809	8043	830	2027	9012	930	2136	9496	980	19.6	13.2	M/R/O/J
3/4	19	0.023	0.58	1611	7163	650	1859	8265	750	2058	9147	830	2306	10249	930	2429	10800	980	17.1	11.5	M/R/O/J
3/4	19	0.028	0.71	1973	8769	650	2276	10118	750	2519	11197	830	2822	12546	930	2974	13220	980	14.2	9.6	M/R/O/J
3/4	19	0.031	0.79	2195	9757	650	2532	11258	750	2803	12458	830	3140	13959	930	3309	14710	980	12.5	8.4	M/R/O/J
3/4	19	0.035	0.89	2473	10992	650	2853	12683	750	3157	14035	830	3538	15726	930	3728	16572	980	11.1	7.5	M/R/O/J
1	25	0.031	0.79	2888	12838	650	3332	14813	750	3688	16393	830	4132	18368	930	4354	19355	980	9.5	6.4	M/R/J
1	25	0.035	0.89	3253	14463	650	3754	16688	750	4154	18468	830	4655	20693	930	4905	21805	980	8.5	5.7	M/R/J
1 1/4	31.75 (32)	0.028	0.71	3296	14653	650	3803	16907	750	4209	18710	830	4716	20965	930	4970	22092	980	8.5	5.7	M/R/J
1 1/4	31.75 (32)	0.031	0.79	3668	16304	650	4232	18812	750	4683	20818	830	5248	23327	930	5530	24581	980	7.4	5.0	M/R/J
1 1/4	31.75 (32)	0.035	0.89	4132	18367	650	4768	21193	750	5276	23454	830	5912	26279	930	6230	27692	980	6.7	4.5	M/R/J
1 1/4	31.75 (32)	0.040	1.00	/	/	/	5357	23813	750	5928	26353	830	6642	29528	930	7000	31115	980	5.9	4.0	R/J
1 1/4	31.75 (32)	0.044	1.10	/	/	/	5893	26194	750	6521	28988	830	7307	32480	930	7700	34227	980	5.3	3.6	R/J
2	50	0.047	1.20	/	/	/	/	/	/	/	/	/	/	/	/	8400	37338	980	3.1	2.1	R/J

UltiMax 极元系列 HT											
宽度 Width		厚度 Thickness		拉力 Strength			延伸率 Elongation	长度 / 单位重量 Length/Weight		卷型 Coil Winding	标准 STANDARD
英寸 in	毫米 mm	英寸 in	毫米 mm	磅 lbs	牛 N	牛 / 平方毫米 N/mm ²	%	英尺 / 磅 ft/lb	米 /kg m/kg		
3/4	19	0.031	0.79	3377	15010	1000	≥ 10%	12.5	8.4	R/O/J	美标 & 欧标 ASTM & EN
1 1/4	31.75	0.031	0.79	5643	25083	1000	≥ 10%	7.4	5	R/O/J	
3/4	19	0.031	0.79	3039	13509	900	6.5-12 % min	12.5	8.4	R/O/J	
1 1/4	31.75	0.031	0.79	5078	22574	900	6.5-12 % min	7.4	5	R/O/J	
M= 迷你卷; R= 单卷; O= 复卷; J= 大复卷 M=Mini wound, R=Ribbon wound, O=Oscillated wound, J=Jumbo wound											

表面处理 FINISH



- 光亮带
Bright
- 发蓝 & 涂蜡
Blue tempered & waxed
- 涂漆 & 涂蜡
Painted and waxed
- 镀锌
Galvanized

缠绕方式 WOUND WAY

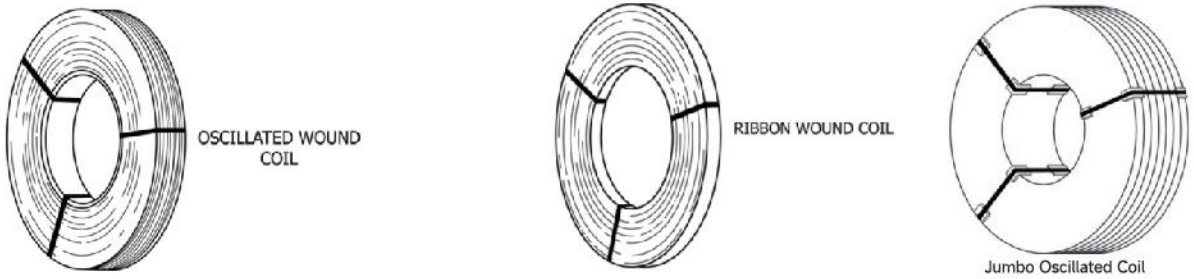

迷你卷 Mini coil	< 25kgs (55lbs)
单卷 Ribbon coil	25-50kgs (55-110 lbs)
复卷 Oscillated coil	40-50kgs (88-110 lbs)
大复卷 / 超大复卷 Jumbo/Super Jumbo coil	180-600kgs (396-1322 lbs)

卷尺寸 COIL SIZE

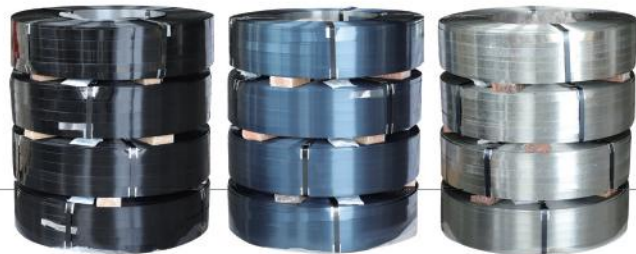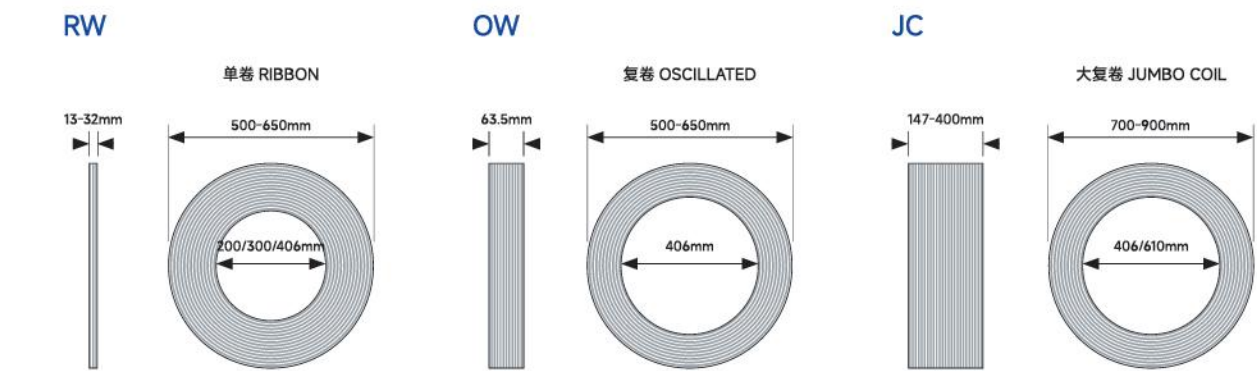

JUHONG 钢带
——可靠、安全、国际认证

JUHONG STEEL STRAPPING
— RELIABLE, SAFE & INTERNATIONALLY CERTIFIED



- 全面强度选择
Strength Options
涵盖常规至超高抗拉强度，满足各类工业包装需求。
From regular to ultra-high tensile, meeting diverse industrial needs.



- 符合全球标准
Global Standards
符合国标、欧标、美标、日标标准。
Compliant with GB, EN, ASTM, and JIS standard.



- 边缘顺滑
Smooth Edges
精确去毛刺，防止手部伤害，确保操作安全。
Precisely de-burred to prevent hand injuries and ensure safe handling.




- 认证表面涂层
Certified Coating
涂层均匀，防锈性能优异，第三方认证。
Even coating with excellent anti-rust performance, verified by third-party certification.



- 多样缠绕方式
Wound Types
迷你、单卷、复卷、大复卷、超大复卷，满足各类包装需求。
Mini, Ribbon, Oscillated, Jumbo, and Super Jumbo to suit diverse packaging needs.

FITS DIVERSE STRAPPING MACHINE

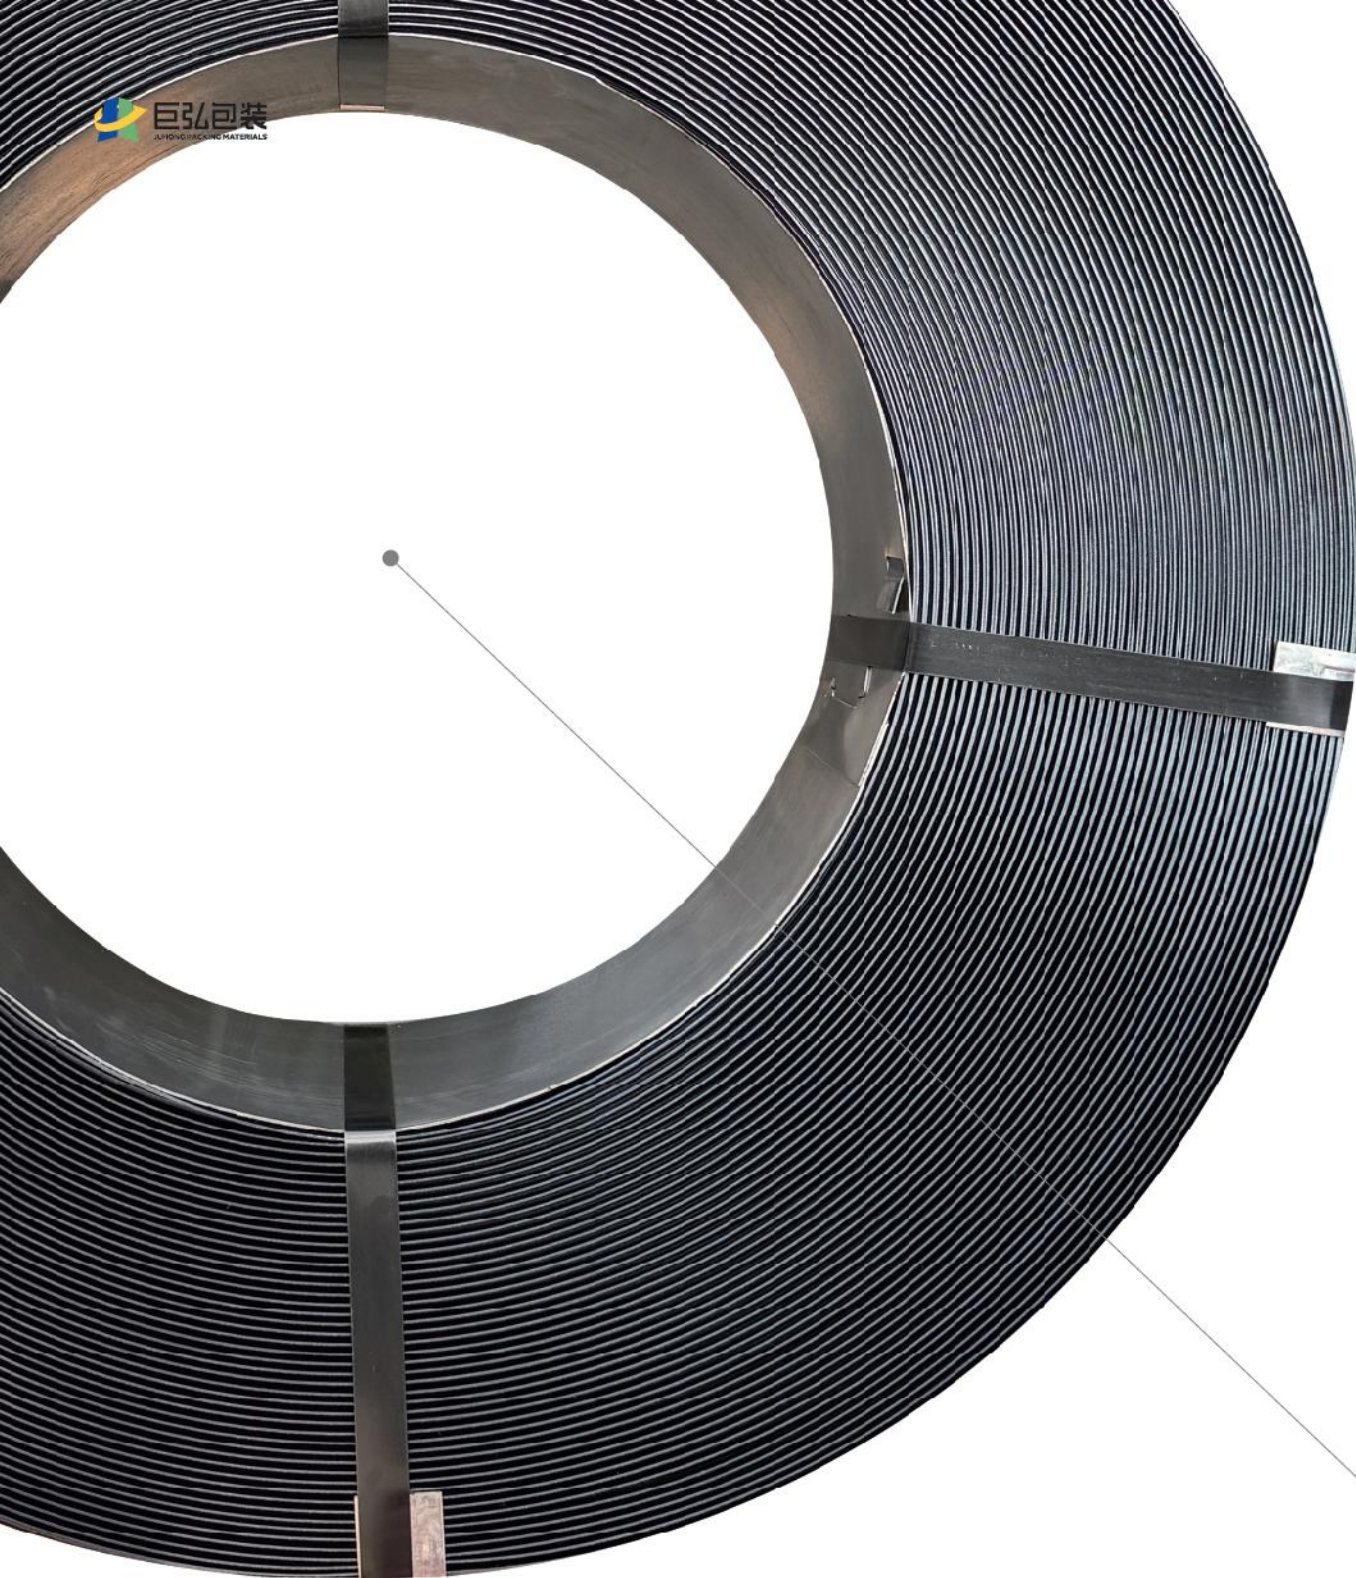

适配各种打包机 FITS DIVERSE STRAPPING MACHINE


钢带打包带，兼容手动、气动及全自动设备，实现快速、牢固、可靠的打包效果。
Strapping bands that work with hand, pneumatic, or fully-auto machines—delivering fast, strong, and reliable performance.



泰坦
Titan



信诺
Signode




钢钣
Kohan Kogyo



西马克
SMS



森德斯
SUND BIRSTA



派克威
Packway



捷锐
Generica



泰尔
Taier

服务多元化行业 SERVING DIVERSE INDUSTRIES

并深受信赖，涉及多个领域
TRUSTED AND APPLIED ACROSS
NUMEROUS SECTORS

- 钢卷 Steel coil
- 线材 Steel Wire
- 有色金属 Non-Ferrous Metal
- 玻璃 Glass
- 木材 Lumber
- 建材 Construction Materials
- 物流 Logistics



玻璃
Glass




电解铜
Electrolytic Copper



钢卷
Steel Coil



木框架
Wooden Frame



线缆
Steel Wire



钢管
Steel Tube



有色金属锭
Non Ferrous Ingot

搭接方式 JOINT METHOD

通用性强，可靠适配多种连接方式与打包机，保障高效稳定。
Universal and reliable—compatible with multiple joint types and strapping machines
for efficient, stable performance.



打包扣连接
Seal joint





点焊免扣连接
Spot-weld sealless joints



模切免扣连接
Die-cut sealless joints

包装 PACKAGING

- 可选单片包装或常规包装
- 单独包装卷采用 VCI 防锈纸缠绕
- 固定于出口木托盘或铁托盘上
- 托盘外覆 VCI 防锈膜，内置干燥剂
- 最外层可选棕色 / 白色 VCI 防锈纸或瓦楞护套
- Individual or non-individual packing
- Individual pack wrapped in VCI anti-rust paper
- Coils secured on wooden or iron pallet
- Covered with VCI film, with desiccants inside
- Outer layer: brown/white VCI paper or corrugated sleeve



适配所有打包机 COMPATIBLE WITH DIVERSE STRAPPING PACKING SYSTEM

全面适配各类打包机，从手动、电动、气动到全自动，始终保持高效与可靠，助力畅快打包。
Seamlessly compatible with diverse strapping machine—from manual, battery powered, pneumatic to fully automatic—ensuring fast, reliable performance for effortless packaging.



意达拓思
ITATOOLS



欧嘉派克
ORGAPACK



气动打包机
PNEUMATIC TOOL



弗洛姆
FROMM



意帝派克
ITIPACK




信诺
SIGNODE



赛克
CYKLOP



捷锐
GENERICA

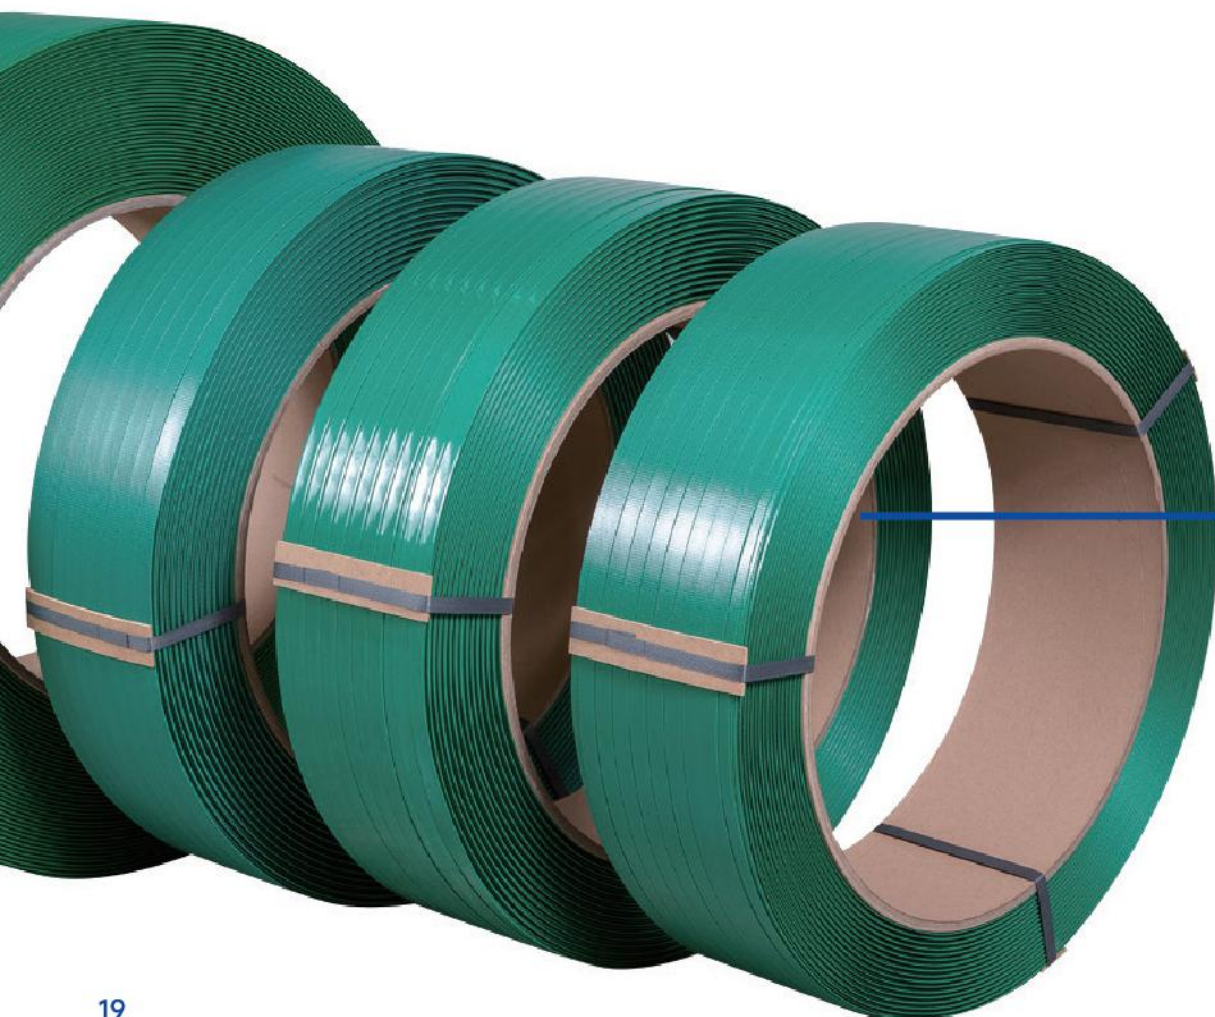

应用行业 APPLICATION INDUSTRY

各行业信赖
Trusted Across Industries

巨弘 PET 打包带以稳定可靠的性能，广泛应用于棉花包、砖石、有色金属锭、瓶罐、纸类、金属卷、木材、管材及玻璃制品包装，长期赢得客户信赖与合作。
Juhong PET strapping, known for its reliable performance, is trusted in packaging cotton bale, bricks, non-ferrous ingots, bottles, paper, metal coils, lumber, pipes, and glass products, securing lasting customer partnerships.



棉花
Cotton Bale



砖石
Brick



有色金属锭
Non Ferrous Ingot



瓶罐
Bottle



纸卷
Paper Roll



金属卷
Steel Coil



木材
Timber



管材类
Pipe



玻璃
Glass

客户 CUSTOMERS



宝武集团
BAOWU



浦项
POSCO



安赛乐米塔尔
ARCELORMITTAL



永青
ETERNAL TSINGSHAN



信义玻璃
XINYI GLASS



金光纸业
APP



圣戈班
SAINT-GOBAIN



北新建材
CNBM



福耀玻璃
FUYAO GLASS



天合光能
TRINA SOLAR



紫金矿业
ZIJIN MINING



江西铜业
JIANGXI COPPER



雪花啤酒
SNOW



中国铝业
CHALCO



盛虹控股集团
SHENG HONG HOLDING GROUP



当升科技
EASPRING



REACH
ROHS
MSDS
PPWR
PFAS



ISO9001
ISO14001
ISO45001



AAR
(钢带 Steel Strap)
(塑钢带 PET Strap)

证书 CERTIFICATION

